


RODIO

125-41491100

MINI RODIO ASYM FLOODLIGHTS made of aluminium, grey, transparent glass beam asymmetric, light output direct, tilting 90°, with converter, dimmability: not dimmable, IP66




DRAWING

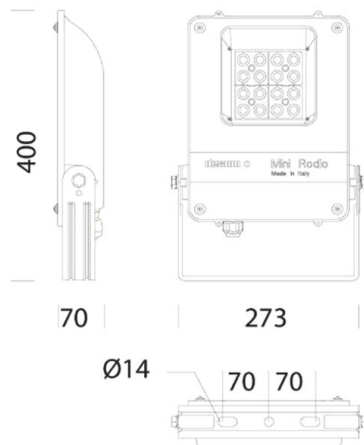

TECHNICAL DETAILS

System perform. [W]	73
Bulb type	LED
Luminous flux [lm]	11436
Colour temp. [K]	4000K
CRI	>80
Optics	transparent glass
Converter	with converter
Dimming	not dimmable
Light output	direct
Beam angle [°]	asymmetrisch
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	273
Width [mm]	70
Height [mm]	400
IP protection class	IP66
Voltage class	protection cl. II
Shock resistance	IK08
Net weight [kg]	3,72
Colour lamp	grey
EAN-Number	8012952146011
Lifetime [h]	80 000
Ambient temperature	-20° bis +40°
Energy efficiency cl.	C

LIGHT DISTRIBUTION CURVE

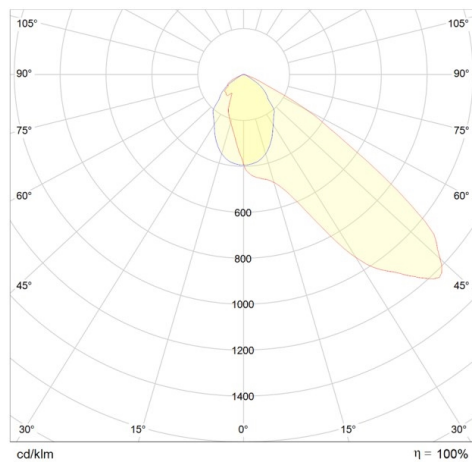

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.