



CAPSULA

CM12107

CAPSULA SINGLE - PC937



Download

COMPONENTS INCLUDED WITH UNIT:

1x assembled suspension light with light source
1x metal ceiling canopy with bracket
2x plastic cable stops
2x hex screws M5x16
1x hex key size 2.5
2x terminal connectors
1x terminal box
1x end cap key
1x cotton gloves
1x installation manual

WARNING:

**Installation must be carried out by
a qualified electrician only.**

**Switch off power at main circuit panel prior to
installation!**

**The manufacturer assumes no liability for
damage occurring in transport or resulting
from incorrect installation.**

Installation time: 30 minutes / 1 person



BROKIS®

BROKIS S.R.O.
ŠPANIELOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG. ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ



CLEANING THE GLASS

BROKIS applies the highest possible quality standards in manufacturing its lights. Prior to shipping, each light undergoes several quality controls and stages of cleaning. Lights may require additional cleaning as a result of transportation, storage, and the amount of time that passes between packing in our plant and subsequent unpacking by the client. Therefore, we emphasize cleaning the lights prior to installation.

The glass must first be rinsed in hot water, with a dilution of a dish-detergent used to remove all foreign particles and dust. Eventually repeat this basic treatment, if necessary. Afterwards the glass must have a second cleaning using hot water, with a dilution of a de-greaser (such as ammonia or vinegar). The glass must then be thoroughly rinsed with running hot water. Eventually repeat this treatment, if necessary. The glass is then thoroughly dried with a paper towel or a clean soft cotton towel. Only re-assemble the glass to the lamp body, when completely cooled down.

Do not use mineral spirits, highly concentrated thinners, or other substances not intended for use on glass surfaces. Also: do not use products, containing silicones – since they will rapidly attract more dust and grease.


PRIOR TO SHIPPING, THE FUNCTIONALITY OF EACH LIGHT AND ITS COMPONENTS IS THOROUGHLY TESTED. THE MANUFACTURER ASSUMES NO LIABILITY FOR THE MISHANDLING OF PRODUCTS.



1. INSTALLING THE CEILING BRACKET


Use anchors of sufficient strength only (not included with unit). With regard for various types and conditions of ceilings, we recommend consulting installation with an expert. The manufacturer assumes no liability for incorrect installation or defects in the material to which the bracket is secured.

Secure the bracket to the ceiling using at least two anchor points.

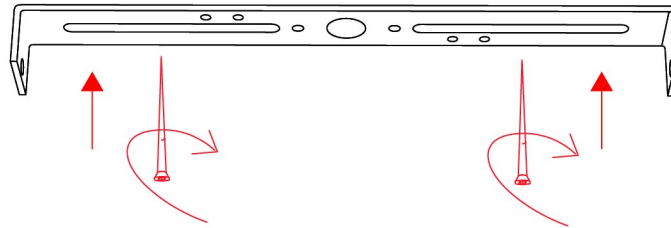


2. INSTALLING THE LIGHT

Pass the power cables through the metal ceiling canopy, adjust their length, and secure them using the plastic cable stops. With the horizontal light source serving as its axis, the light must not be angled more than 30° .

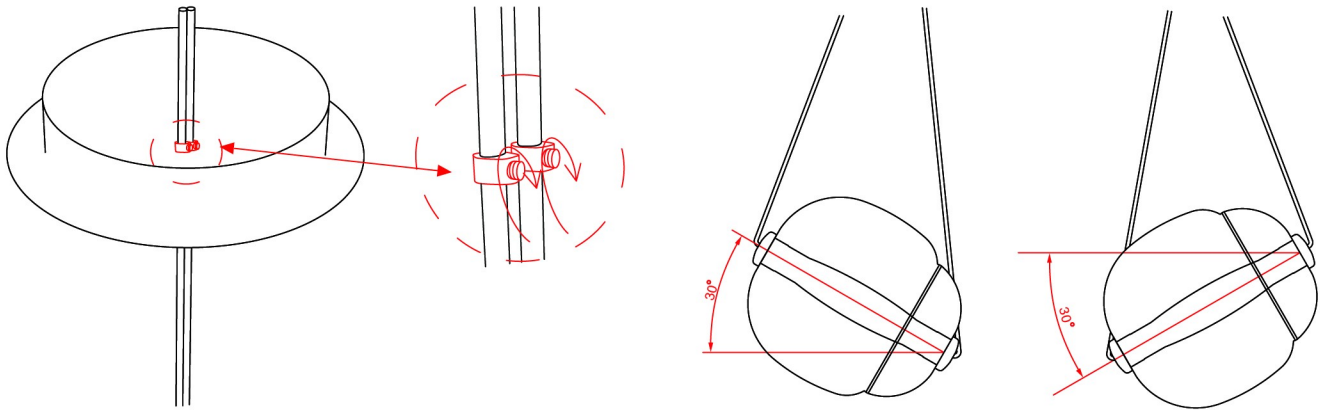


3. CONNECTING THE LIGHT TO THE BUILDING WIRING

Connect the light to the building wiring according to the connection diagram. Care must be taken to ensure the individual wires are stowed in the terminal box.

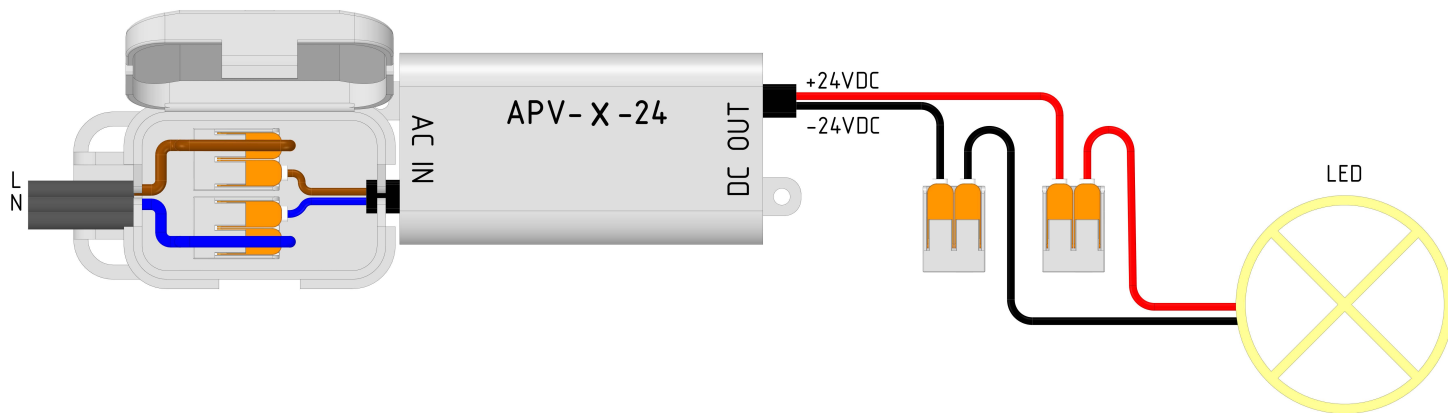


4. INSTALLING THE CEILING CANOPY

Using the two set screws M5x16 and the 2.5 hex key, secure the ceiling canopy to the bracket.

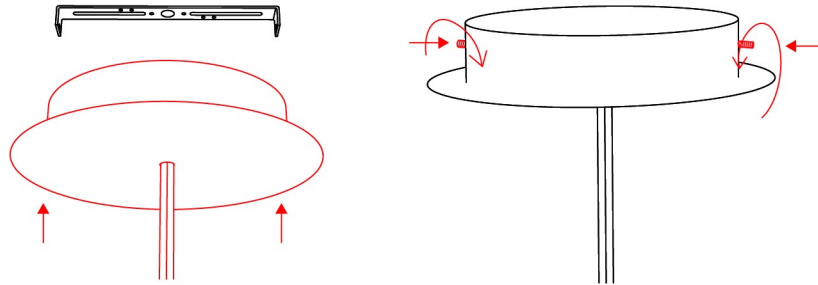

5. SWITCHING ON THE LIGHT

Restore power at the main circuit panel and verify that the light works properly.

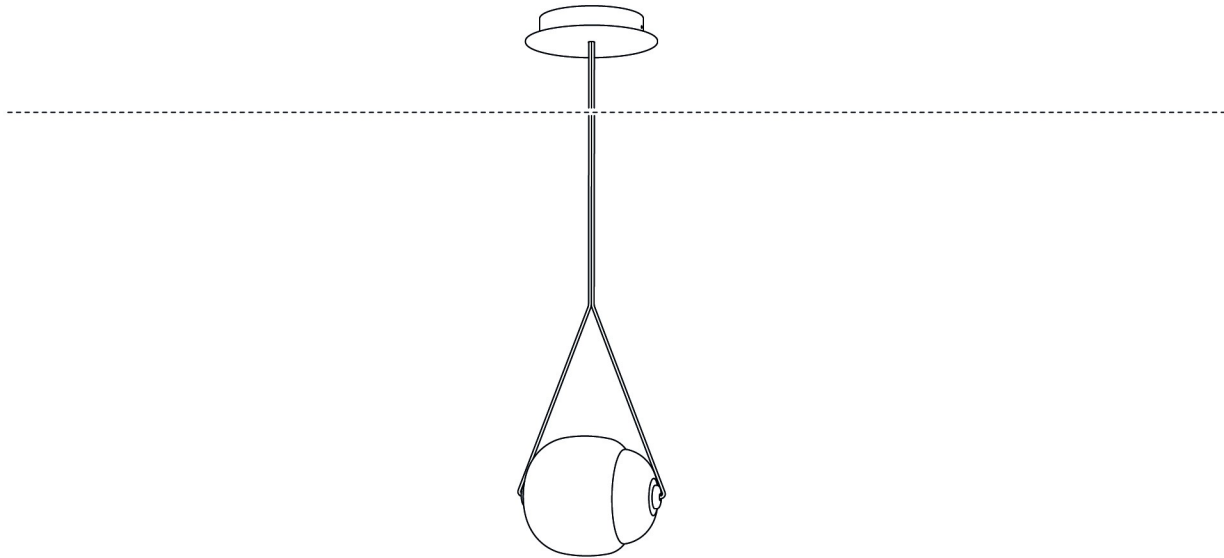

6. CABLE REPLACEMENT AND LIGHT SOURCE REPLACEMENT

Remove the covers from the metal caps on both ends of the light. Next, unscrew the sleeve nuts and pull the power connectors out of the light source. Place the disassembled light on a soft surface with the inner glass up. Using the end cap key, remove the metal end cap. Carefully remove the inner glass. Hold the light source and turn the light so that it is in a horizontal position. Remove the metal cap from the other end of the light and then pull the light source out of the outer glass. After cleaning the glass components, follow these steps in reverse order to reassemble the light.

Follows these steps when replacing the light source.

Warning: turn off the power supply before replacing the light source and cleaning the inner parts!

