


NUUN

222-00126


NUUN SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black gold, similar to RAL 9005, lens beam 60°, light output direct, UGR <28, swiveling 120°, tilting 90°, with converter, max. 600mA, dimmability: DALI 2, Push, adapter/ceiling base black, pendant length 2500mm, IP20



DRAWING

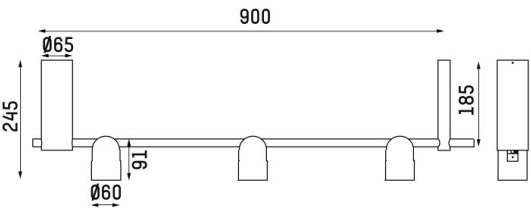

LIGHT DISTRIBUTION CURVE

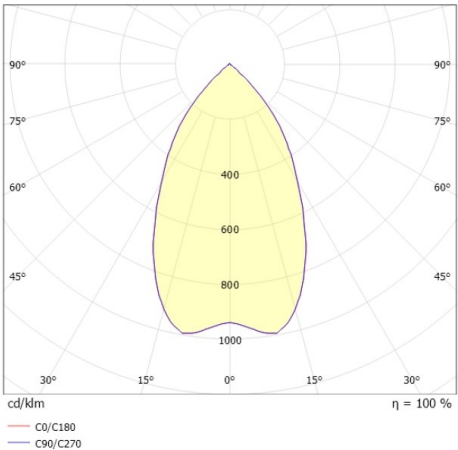

TECHNICAL DETAILS

System perform. [W]	18
Bulb type	LED
Luminous flux [lm]	1410
Current sec. [mA]	600
Colour temp. [K]	2700/3000K
CRI	>90
UGR	<28
Optics	lens
Converter	with converter
Light output	direct
Beam angle [°]	60°
Voltage [V]	220-240V 50Hz
Material	aluminium
Length [mm]	900
Width [mm]	70
Height [mm]	245
Pendant length [mm]	2500
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	1,50
Colour lamp	black gold
RAL	9005
Colour adapter/ceiling base	black
EAN-Number	9010870534773
Energy efficiency cl.	F
No. of luminaires B16A	77



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.