



# YARA

273-1002s

YARA SQUARE F BOLLARD grey matt, similar to RAL 7012, beam 360°, with converter, dimmability: not dimmable, IP65

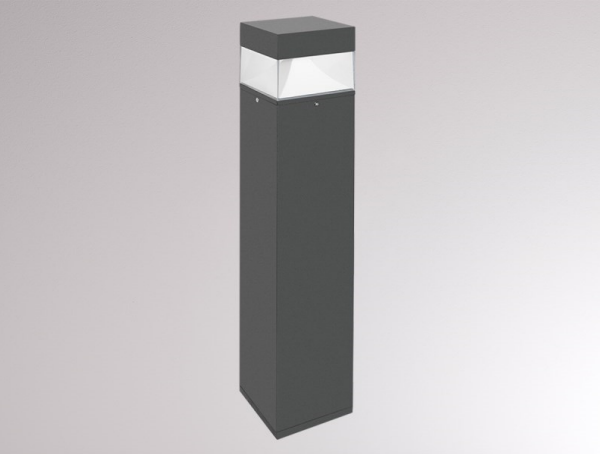


## DRAWING

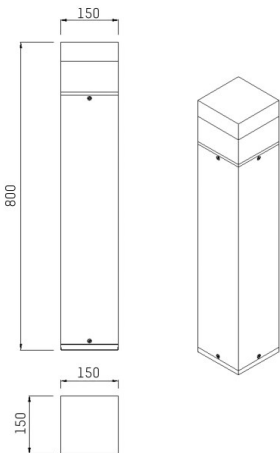

## TECHNICAL DETAILS

|                       |                  |
|-----------------------|------------------|
| System perform. [W]   | 10               |
| Bulb type             | LED              |
| Luminous flux [lm]    | 800              |
| Colour temp. [K]      | 3000K            |
| CRI                   | >80              |
| Converter             | with converter   |
| Dimming               | not dimmable     |
| Beam angle [°]        | 360°             |
| Voltage [V]           | 220-240V 50/60Hz |
| Length [mm]           | 150              |
| Width [mm]            | 150              |
| Height [mm]           | 800              |
| IP protection class   | IP65             |
| Voltage class         | protection cl. I |
| Shock resistance      | IK10             |
| Net weight [kg]       | 4,50             |
| Colour lamp           | grey matt        |
| RAL                   | 7012             |
| EAN-Number            | 9010506027570    |
| Lifetime [h]          | L80 B10 20 000   |
| Energy efficiency cl. | D                |

## LIGHT DISTRIBUTION CURVE

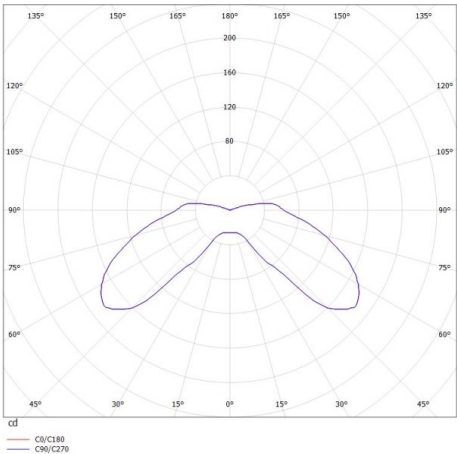

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.