


WINDOW

305-6801p

WINDOW I RECESSED SPOTLIGHT made of aluminium, natural anodised, light output direct, without converter, max. 250mA, dimmability: see converter, IP20




DRAWING

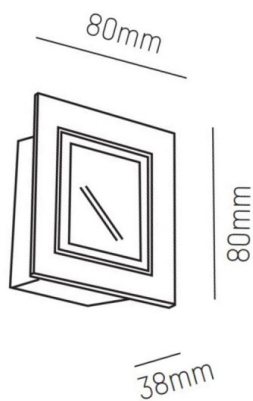

TECHNICAL DETAILS

Bulb type	LED 3W
Luminous flux (lm)	235
Current sec. (mA)	250
Colour temp. (K)	3000K
CRI	>80
Converter	without converter
Dimming	see converter
Light output	direct
Voltage [V]	9 VDC
Material	aluminium
Length (mm)	80
Width (mm)	80
Height (mm)	38
Ceiling cutout (mm)	69x69
Recess depth (mm)	68
IP protection class	IP20
Voltage class	protection cl. III
Net weight (kg)	0,12
Colour lamp	natural anodised
EAN-Number	9008905807091
Lifetime (h)	L80 B10 20 000
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

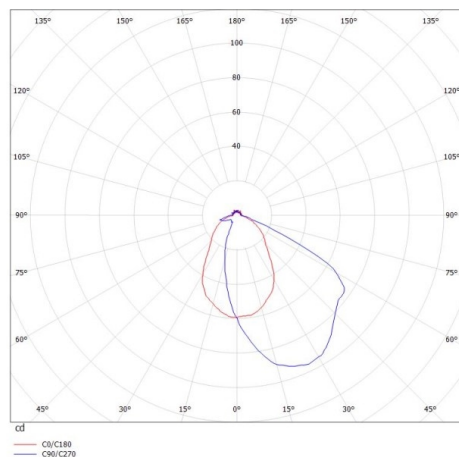

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.