


MIMO

333-00002

MIMO T TABLE LUMINAIRE made of aluminium, sand, lens beam 30°, accessoire: Ladestation, light output direct, UGR 8, tilting 360°, dimmability: Touch Dim, IP54




DRAWING

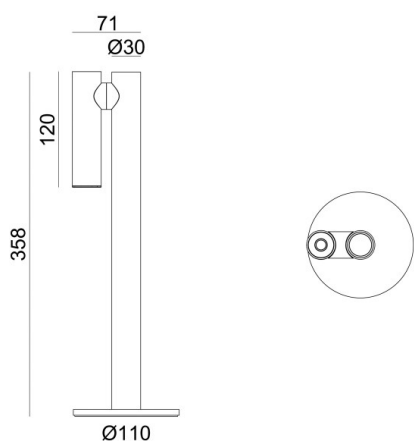

TECHNICAL DETAILS

System perform. [W]	2,2
Bulb type	LED
Luminous flux [lm]	50
Colour temp. [K]	2700K
CRI	>80
UGR	8
Optics	lens
Light output	direct
Beam angle [°]	30°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	358
Diameter [mm]	110
IP protection class	IP54
Voltage class	protection cl. III
Net weight [kg]	0,90
Colour lamp	sand
EAN-Number	9010870416178
Energy efficiency cl.	E

LIGHT DISTRIBUTION CURVE

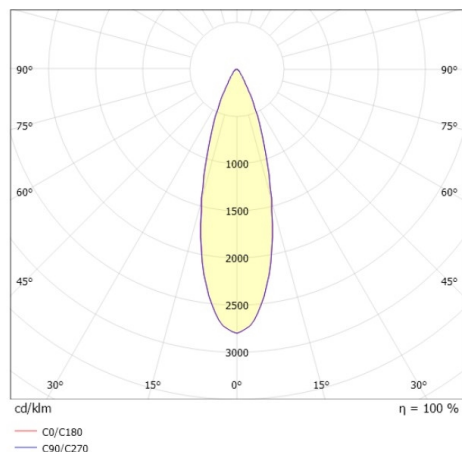

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.