


FORIS

333-00030

FORIS ROUND SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, anthrazite, similar to RAL 7024, high-efficiently vacuum deposited aluminium reflector without safety glass beam 60°, light output direct, UGR <22, dimmability: on/off, IP65




DRAWING

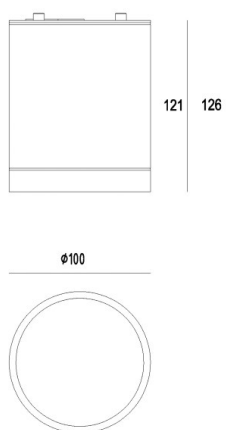

TECHNICAL DETAILS

| | |
|------------------------|--|
| System perform. [W] | 11 |
| Bulb type | LED |
| Luminous flux [lm] | 860/920lm |
| Colour temp. [K] | 2700/3000K |
| CRI | >90 |
| UGR | <22 |
| Optics | aluminium reflector without protection glass |
| Light output | direct |
| Beam angle [°] | 60° |
| Voltage [V] | 220-240V 50/60Hz |
| Material | aluminium |
| Height [mm] | 126 |
| Diameter [mm] | 100 |
| IP protection class | IP65 |
| Voltage class | protection cl. I |
| Shock resistance | IK06 |
| Net weight [kg] | 0,74 |
| Colour lamp | anthrazite |
| RAL | 7024 |
| EAN-Number | 9010870409095 |
| Lifetime [h] | L80 B10 50 000 |
| Energy efficiency cl. | D |
| No. of luminaires B16A | 74 |

LIGHT DISTRIBUTION CURVE

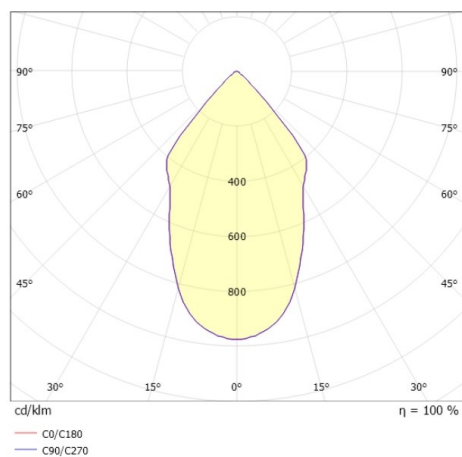

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.