

CORBA

333-00048

CORBA SQ W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016,high-efficiently vacuum deposited aluminium reflector without safety glass beam 36°, light output direct / indirect, dimmability: DALI, IP65




DRAWING

TECHNICAL DETAILS

System perform. [W]	24
Bulb type	LED
Luminous flux [lm]	2345
Colour temp. [K]	3000K
CRI	>90
Optics	aluminium reflector without protection glass
Light output	direct / indirect
Beam angle [°]	36°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	100
Width [mm]	100
Height [mm]	220
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK10
Net weight [kg]	1,64
Colour lamp	anthrazite
RAL	7016
EAN-Number	9010870414297
Energy efficiency cl.	D
No. of luminaires B16A	94

LIGHT DISTRIBUTION CURVE

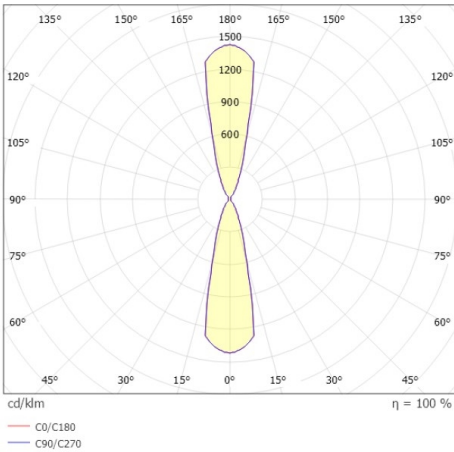

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.