

WADO

333-00051

WADO DOUBLE W SURFACE MOUNTED WALL LUMINAIRE made of aluminium, anthrazite, similar to RAL 7016, high-efficiently vacuum deposited aluminium reflector without safety glass beam 36°, light output direct / indirect, UGR <19, dimmability: on/off, IP65




DRAWING



TECHNICAL DETAILS

System perform. [W]	20
Bulb type	LED
Luminous flux [lm]	1890/2035
Colour temp. [K]	2700/3000K
CRI	>90
UGR	<19
Optics	aluminium reflector without protection glass
Designer	INHOUSE
Light output	direct / indirect
Beam angle [°]	36°
Voltage [V]	220-240V 50Hz
Material	aluminium
Length [mm]	110
Width [mm]	110
Height [mm]	120
IP protection class	IP65
Voltage class	protection cl. I
Shock resistance	IK06
Net weight [kg]	1,42
Colour lamp	anthrazite
RAL	7016
EAN-Number	9010870451865
Lifetime [h]	L80 B10 50 000
Energy efficiency cl.	D
No. of luminaires B16A	20

LIGHT DISTRIBUTION CURVE

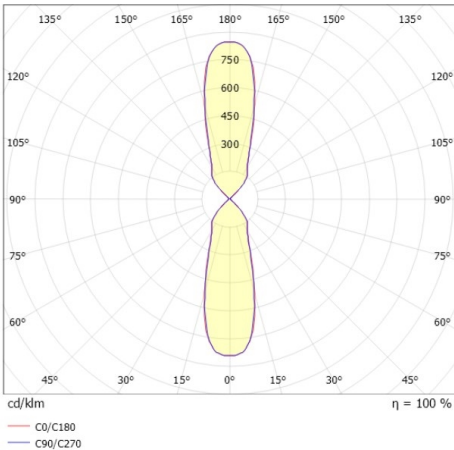

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.