


UP

472-0501090002705

UP AC SD SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9003, light output direct, dimmability: not dimmable, IP20




DRAWING

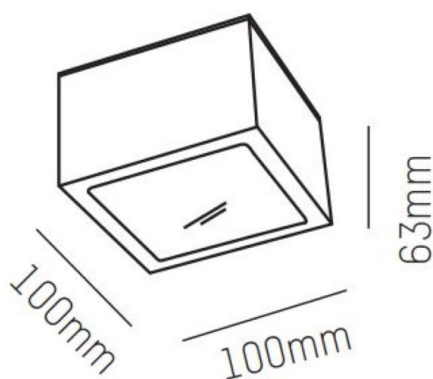

TECHNICAL DETAILS

System perform. [W]	10
Bulb type	LED
Luminous flux [lm]	560
Colour temp. [K]	2700K
CRI	>90
Dimming	not dimmable
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Length [mm]	100
Width [mm]	100
Height [mm]	63
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,50
Colour lamp	white
RAL	9003
EAN-Number	9008905924781
Lifetime [h]	L80 B10 20 000
Energy efficiency cl.	F

LIGHT DISTRIBUTION CURVE

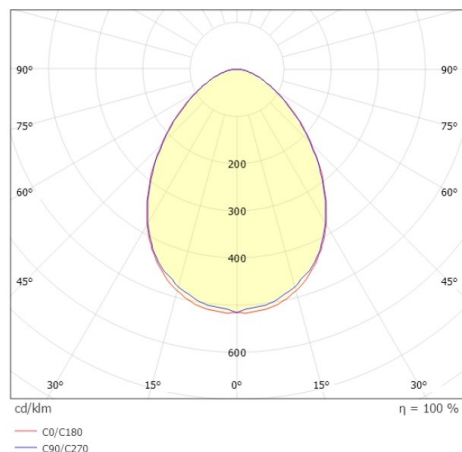

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.