



## AFTER 8 PDI

601-01041102341a


AFTER 8 SUSPENSION made of aluminium, black anodised, satined PMMA opal diffuser light output direct / indirect 60:40, with converter, max. 1050mA, dimmable 1-10V, cable transparent, adapter/ceiling base white, pendant length 2000mm, IP20

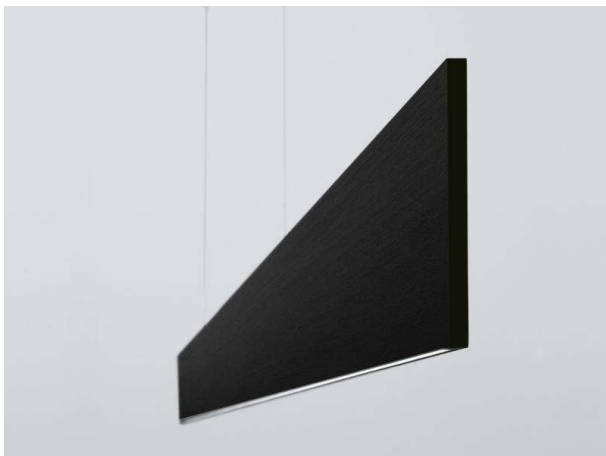

## DRAWING

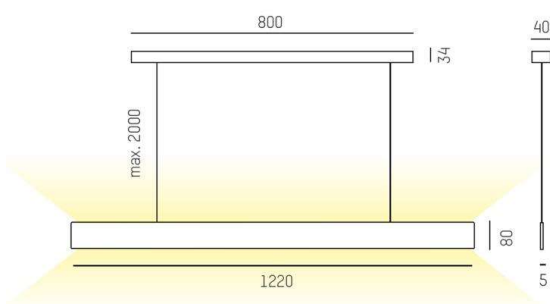

## LIGHT DISTRIBUTION CURVE

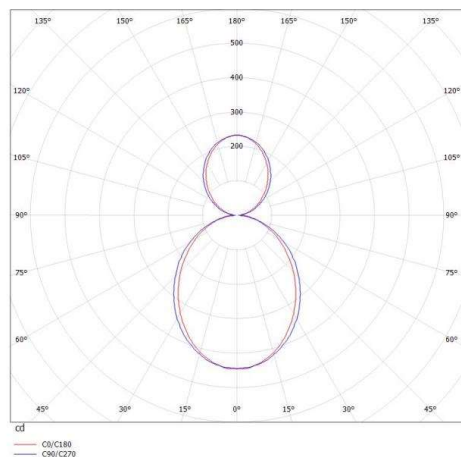

## TECHNICAL DETAILS

System perform.[W]	41
Bulb type	LED
Luminous flux [lm]	1900
Current sec.[mA]	1050
Colour temp. [K]	2700K
CRI	>90
Optics	PMMA opal diffuser
Designer	INHOUSE
Converter	with converter
Dimming	1-10V
Light output	direct / indirect 60:40
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Width [mm]	5
Height [mm]	79
Pendant length	2000
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,815

Color	black anodised
Color adapter	white
Electric wire	transparent
EAN-Number	9008905925535
Lifetime [h]	50000
Energy efficiency cl.	A++-A
No. of luminaires B16A	34

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.