


TRIGGA PD

662-004020223550


TRIGGA SUSPENSION made of aluminium, white matt, similar to RAL 9016, anti-glare LFO lens due to microfaceted structure beam 30°, light output direct, UGR <16, with converter, max. 350mA, cable white, fabric, adapter/ceiling base white matt, pendant length 1500mm, IP20



DRAWING

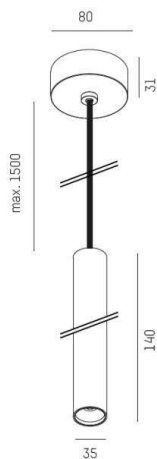

LIGHT DISTRIBUTION CURVE

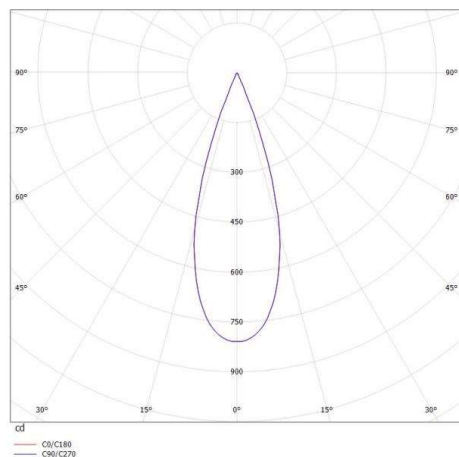

TECHNICAL DETAILS

System perform. [W]	6
Bulb type	LED
Luminous flux [lm]	230
Current sec. [mA]	350
Colour temp. [K]	2700K
CRI	>90
UGR	<16
Optics	LFO lens
Designer	Serge & Robert Cornelissen
Converter	with converter
Light output	direct
Beam angle [°]	30°
Voltage [V]	220-240V 50/60Hz
Material	aluminium
Height [mm]	140
Pendant length [mm]	1500
Diameter [mm]	35
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,44958
Color	white matt
RAL	9016
Color adapter	white matt
Electric wire	white, fabric
EAN-Number	9008905744303
Lifetime [h]	50000
Energy efficiency cl.	A++-A
No. of luminaires B16A	8

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.