


CHARM SD

671-101011023050


CHARM SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, white, similar to RAL 9016, sated PMMA opal diffuser light output direct, max. 600mA, through wiring 3xAWG18, IP20



DRAWING

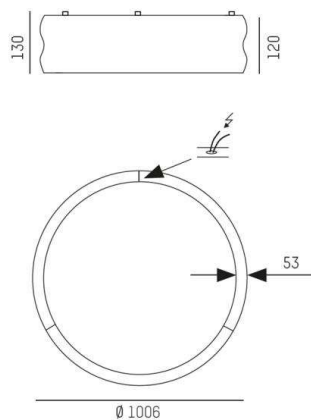

LIGHT DISTRIBUTION CURVE

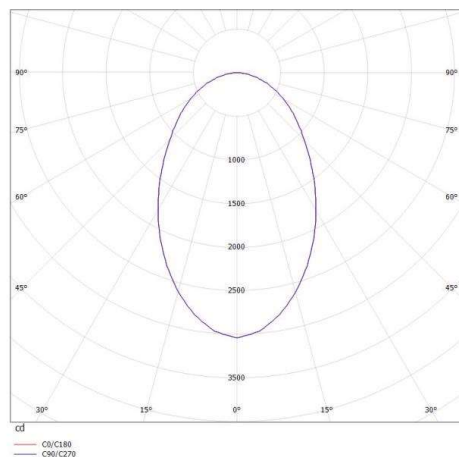

TECHNICAL DETAILS

System perform. [W]	91
Bulb type	LED
Luminous flux [lm]	5320
Current sec. [mA]	600
Colour temp. [K]	2700K
CRI	>90
Optics	PMMA opal diffuser
Designer	Serge Cornelissen
Light output	direct
Voltage [V]	220-240V 50/60Hz
Through wiring	3xAWG18
Material	aluminium

Width [mm]	53
Height [mm]	130
Diameter [mm]	1006
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	9,91

Color lamp	white
RAL	9016
EAN-Number	9008905780035
Lifetime [h]	50 000 L80 B10
No. of luminaires B16A	8

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.