


CHARM SD

671-101011023060


CHARM SURFACE MOUNTED CEILING LUMINAIRE made of aluminium, black, similar to RAL 9005, sated PMMA opal diffuser light output direct, with converter, max. 600mA, through wiring 3xAWG18, IP20



DRAWING

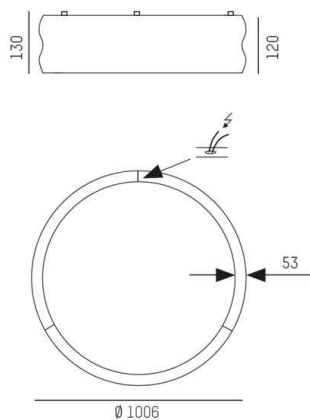

LIGHT DISTRIBUTION CURVE

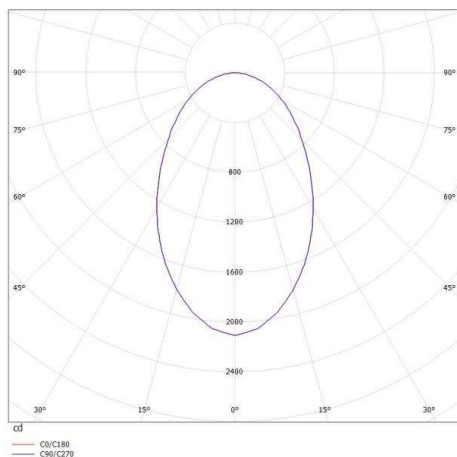

TECHNICAL DETAILS

System perform. [W]	91
Bulb type	LED
Luminous flux [lm]	3690
Current sec. [mA]	600
Colour temp. [K]	2700K
CRI	>90
Optics	PMMA opal diffuser
Designer	Serge Cornelissen
Converter	with converter
Light output	direct
Voltage [V]	220-240V 50/60Hz
Through wiring	3xAWG18
Material	aluminium

Width [mm]	53
Height [mm]	130
Diameter [mm]	1006
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	9,632529

Color	black
RAL	9005
EAN-Number	9008905780042
Lifetime [h]	50000
Energy efficiency cl.	A++-A
No. of luminaires B16A	8

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.