



AFTER 8 ROUND PDI

678-00154102370a

AFTER8 ROUND SUSPENSION made of aluminium, graphite grey anodised, sated PMMA opal diffuser light output direct / indirect 60:40, max. 1050mA, dimmable 1-10V, cable Spannungsführung in den Abhängeseilen, adapter/ceiling base white, pendant length 2000mm, IP20 Possible colour differences related to the process

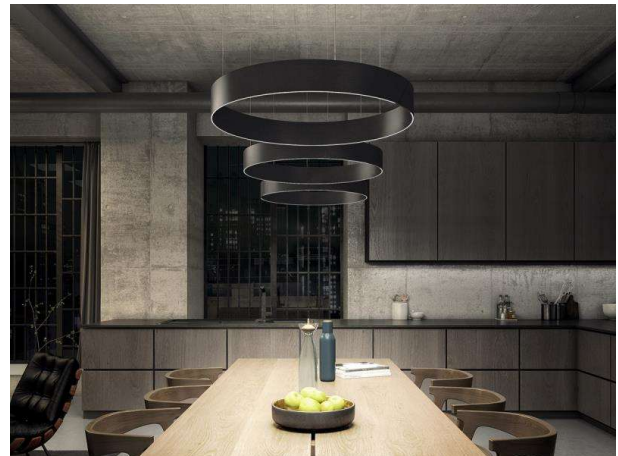

DRAWING

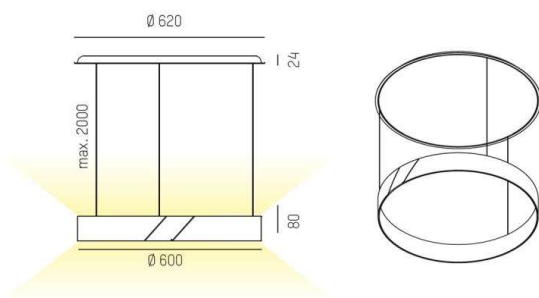


TECHNICAL DETAILS

System perform. [W]	54
Bulb type	LED 54W
Luminous flux [lm]	2390
Current sec. [mA]	1050
Colour temp. [K]	2700K
CRI	>90
Optics	PMMA opal diffuser
Designer	INHOUSE
Dimming	1-10V
Light output	direct / indirect 60:40
Voltage [V]	220-240V 50/60Hz
Material	aluminium

Width [mm]	5
Height [mm]	79
Pendant length [mm]	2000
Diameter [mm]	600
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	2,938

LIGHT DISTRIBUTION CURVE

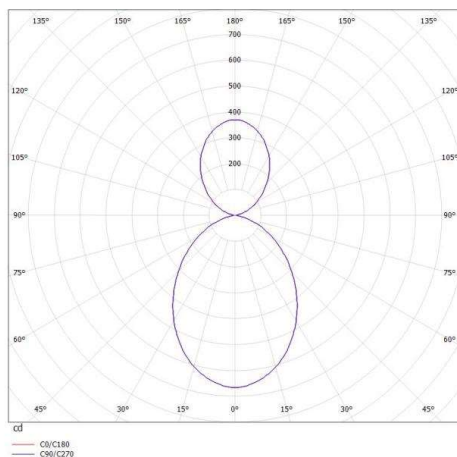

Color	graphite grey anodised
Color adapter	white
Electric wire	Tension control in the suspension ropes
EAN-Number	9008905924156
Lifetime [h]	50000
Energy efficiency cl.	A++-A
No. of luminaires B16A	15

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.