


**AKON SD**


**661-00303052906d**

AKON WALL / CEILING LUMINAIRE made of die-cast aluminium, black, similar to RAL 9005, microfaceted free-form reflector light output direct, with converter, max. 500mA, dimmable DALI, IP20

**DRAWING**

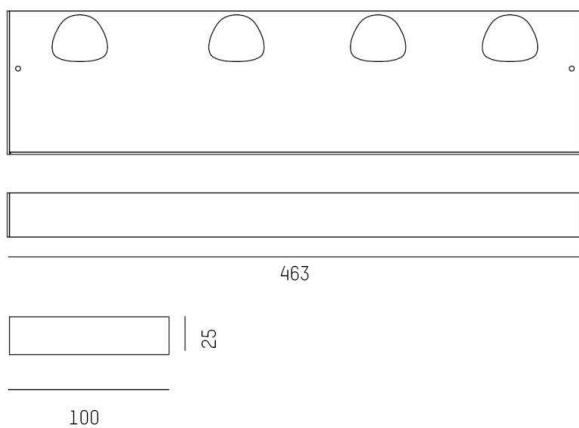

**LIGHT DISTRIBUTION CURVE**

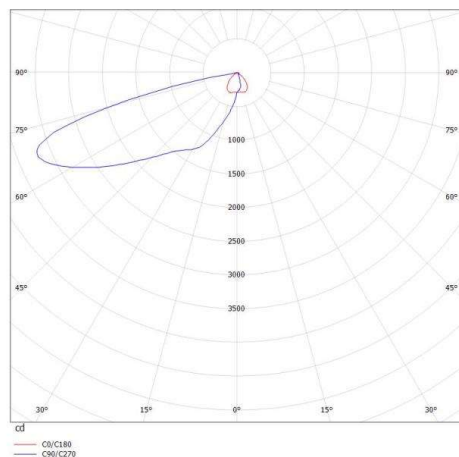

**TECHNICAL DETAILS**

System perform. [W]	28
Bulb type	LED
Luminous flux [lm]	1620
Current sec. [mA]	500
Colour temp. [K]	3000K
CRI	>90
Optics	microfaceted free-form reflector
Designer	INHOUSE
Converter	with converter
Dimming	DALI
Light output	direct
Voltage [V]	220-240V 50/60Hz
Material	die-cast aluminium
Length [mm]	463
Width [mm]	100
Height [mm]	25
IP protection class	IP20
Voltage class	protection cl. I
Net weight [kg]	0,97077
Color	black
RAL	9005
EAN-Number	9008905723414
Lifetime [h]	50000
Energy efficiency cl.	A++-A

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.