



WEVER & DUCRÉ
LIGHTING

ARZY
1.0

325163W4

GENERAL

Wall

Surface

Signal White

IP20

Interior

380 lm

9003^a

LED

3000 K

3-step binning

OPTICAL

Opal

PHYSICAL

Length 250 mm

Width 85 mm

Height 204 mm

1.6 kg

ELECTRICAL

incl. power supply

220 - 240 V

Total connected power 6 W

PC1

Safety distance 0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.



Project

Type

Notes

Quantity

Date

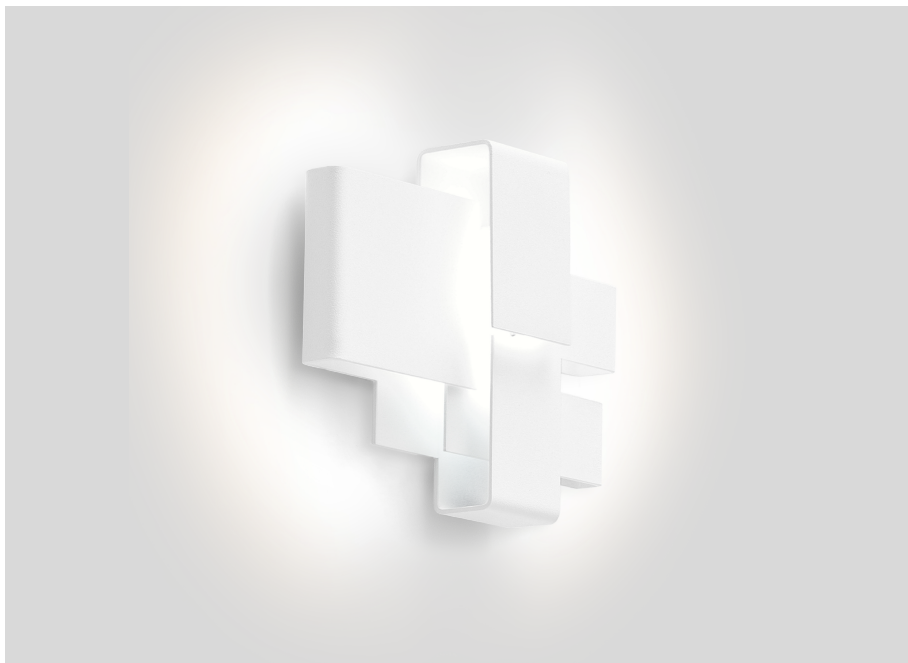



WEVER & DUCRÉ
LIGHTING

ARZY 1.0

325163W4

Maintenance Factors

| Operating Time [h] | 10 000 | 20 000 | 30 000 | 40 000 | 50 000 |
|--------------------|--------|--------|--------|--------|--------|
| LLMF | 0.97 | 0.94 | 0.92 | 0.89 | 0.87 |
| LSF | 1 | 1 | 1 | 1 | 1 |

| | | | |
|------------------|--|-------------------|---------------------------------|
| MF | $LMF \times RSMF \times LLMF \times LSF$ | RSMF ^a | Room Surface Maintenance Factor |
| MF | Maintenance Factor | LLMF | Lamp Lumens Maintenance Factor |
| LMF ^a | Luminaire Maintenance Factor | LSF | Lamp Survival Faktor |

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.