



WEVER & DUCRÉ
LIGHTING

BLIEK ROUND 1.0 LED

125161K5

Project
Type
Notes
Quantity
Date

GENERAL

Ceiling
Recessed
Jet Black + Gold
IP20
Interior
585^a to 785^b lm
9005^c

LED

3000 K
CRI 90
L80 / 50000 h
3-step binning

OPTICAL

Flood
Beam angle 36°

PHYSICAL

Diameter 135 mm
Height 59 mm
0.45 kg
Tilt max 60°
Rotation 355°

ELECTRICAL

excl. power supply
18 V
Total connected power 7.9^a to 12^b W
LED Inset 5.9^a to 8.7^b W
350^a to 500^b mA
PC3
Safety distance 0.3 m



CUTOUT

Diameter 126-130 mm
Min. ceiling thickness 4 mm
Max. ceiling thickness 25 mm
Recessed depth 75 mm


^a 350mA

^b 500mA

^c RAL Palette colors may deviate slightly due to production conditions.



LIGHT DISTRIBUTION

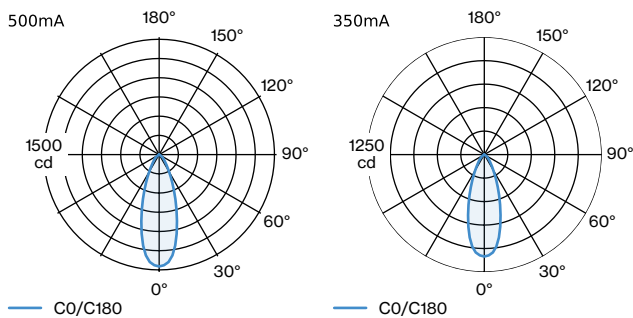

[125161K5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for December 14, 2020 the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BVBA apply.
© Wever & Ducré BVBA · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

BLIEK ROUND 1.0 LED

125161K5

CONE DIAGRAM

flood 36° 500mA			flood 36° 350mA		
h (m)	EO° (lx)	ø (m)	h (m)	EO° (lx)	ø (m)
1	1450	0.65	1	1080	0.65
2	364	1.29	2	271	1.29
3	162	1.94	3	121	1.94
4	90	2.59	4	67	2.59
5	58	3.23	5	43	3.23

ELECTRICAL

Power Supply 350mA

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
6W 3-22V	64·35·21	3 - 22V	9 0 2 1 3 2 0 2
10W 14-28V 1-10V dim	101.5·51·29.5	14 - 28V	9 0 2 2 3 4 0 1
10W 12-28V phase-cut dim	102·38·21	12 - 28V	9 0 2 2 3 4 0 2
10W 2.5-26V DALI dim 5-100%	124·31·21	2.5 - 26V	9 0 2 4 3 4 0 1

Power Supply 500mA

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
10W 11-20V	101.5·51·29.2	11 - 20V	9 0 2 1 4 4 0 5
15W 13.5-30V phase-cut dim 5-100%	102·51·30	13.5 - 30V	9 0 2 2 4 5 0 1
20W 5-40V DALI 0-100%	111·52·22	5-40V	9 0 2 4 4 6 0 2