



WEVER & DUCRÉ  
LIGHTING

# DEEP

## petit IP65 1.0

153761W3

Project

Type

Notes

Quantity

Date

### GENERAL

Ceiling , Recessed

White Matt

RAL 9010<sup>a</sup>

IP65

IC rated

Exterior

Output: 520 lm

CIE flux code: 98 100 100 100 100

### LED

2700 K

2 SDCM

### OPTICAL

Flood , Beam angle 31°

### ELECTRICAL

excl. driver

17 V

LED Inset 6.0 W

Class 3

350 mA

### PHYSICAL

Diameter 80 mm

Height 55 mm

0.04 kg

wire springs

### CUTOUT


Diameter 68-70 mm

Min. ceiling thickness 4 mm

Max. ceiling thickness 23 mm

Recessed depth 60 mm

<sup>a</sup> Color may deviate slightly due to production conditions.

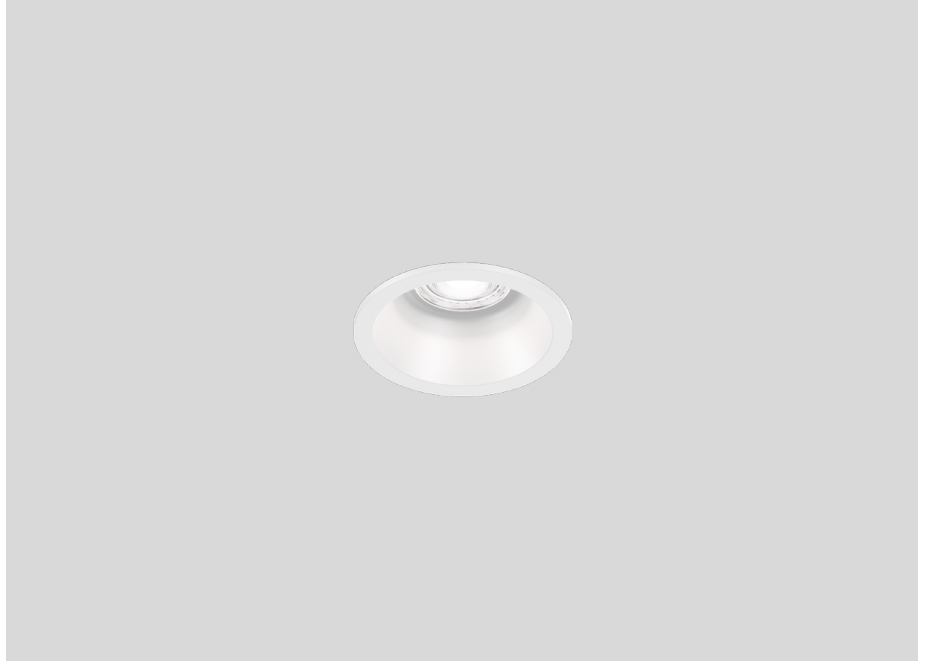



WEVER & DUCRÉ  
LIGHTING

# DEEP

## petit IP65 1.0

153761W3

### Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

### ELECTRICAL

#### Driver

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
6W   350mA	67-39-22	8.6-18V	9 0 2 1 3 3 0 3
17W   350mA   5-49V   IP68	122-54-26	5-49V	9 0 2 1 3 6 0 2
7W   350mA	69-34-22	12-21V	9 0 2 2 3 3 0 1
10W   350mA   1-10V dim	101.5-51-29.5	14-28V	9 0 2 2 3 4 0 1
10W   350mA   phase-cut dim	102-38-21	12-28V	9 0 2 2 3 4 0 2
10W   350mA	115-41-25	13-26V	9 0 2 2 3 4 0 6