



WEVER & DUCRÉ
LIGHTING

DEEP

point IP44 1.0 LED

185161W3

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling

Recessed

White Matt

Front IP44

Back IP20

Interior

370 lm

LED

2700 K

OPTICAL

Beam angle 32°

ELECTRICAL

excl. driver

18 V

Total connected power 6.0 W

LED Inset 6.0 W

Class 3

Safety distance 0.3 m

PHYSICAL

Diameter 45 mm

Height 42 mm

0.1 kg

wire springs


CUTOUT

Diameter 38-41 mm

Min. ceiling thickness 4 mm

Max. ceiling thickness 25 mm

Recessed depth 85 mm

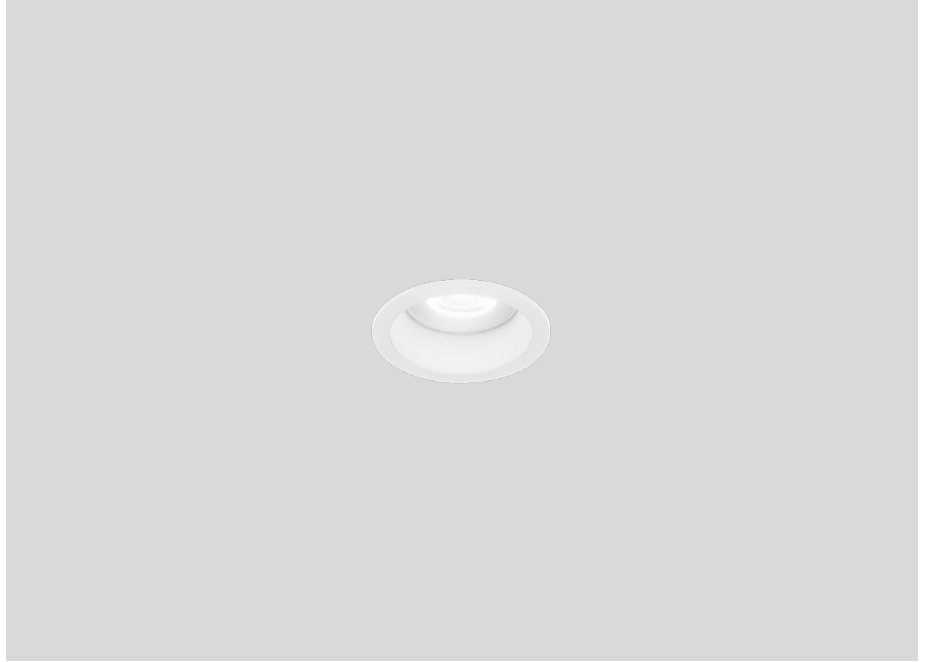



WEVER & DUCRÉ
LIGHTING

DEEP

point IP44 1.0 LED

185161W3

ELECTRICAL

Driver

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
7.2W 250mA 16-29V phase-cut dim	122·41·23	16 - 29V	9 0 2 2 6 4 0 1
10W 250mA 6-40V DALI	124·31·21	6 - 40V	9 0 2 4 9 4 0 2