

Project
Type
Notes
Quantity
Date

GENERAL

Wall , Surface
 Champagne
 IP20
 Interior
 Output: 435 lm
 CIE flux code: 3 27 62 44 100

LED


3000 K
 CRI ≥ 90
 L80 / 55000h
 2 SDCM

ELECTRICAL


phase-cut dim
 220 - 240 V
 Total connected power 8.2 W
 Class 1

PHYSICAL


Length 150 mm
 Width 65 mm
 Height 75 mm
 0.4 kg

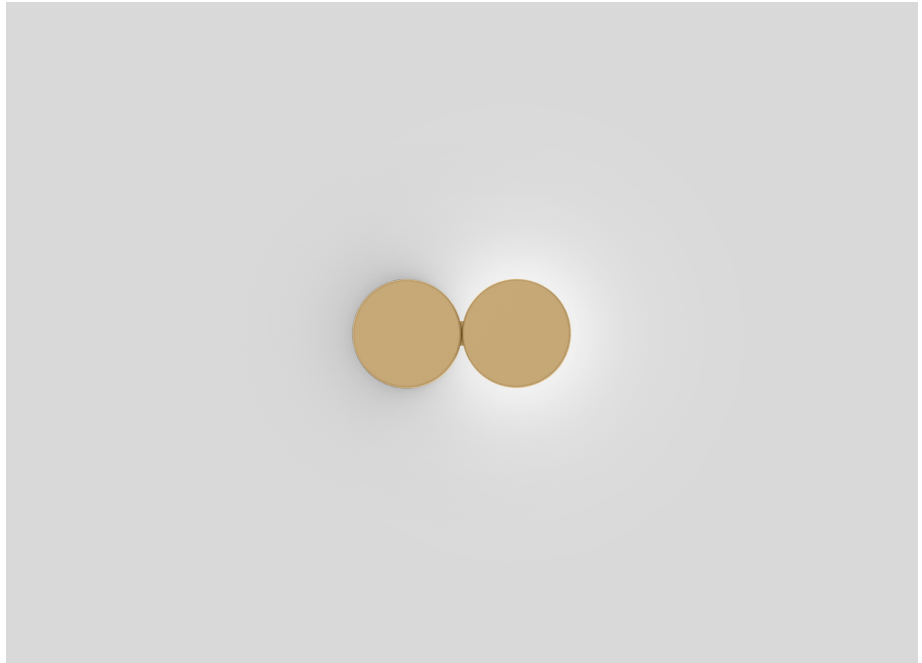

Wall surface luminaire made from aluminium; surface Champagne; wet painted, smooth semi glossy; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; 220 - 240 V; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;



LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

DOT 2.0

330164M5