



WEVER & DUCRÉ
LIGHTING

DOT 3.0

330264B3

Project
Type
Notes
Quantity
Date

GENERAL

Wall , Surface
 Black Matt
 RAL 9005^a
 IP20
 Interior
 Output: 790 lm
 CIE flux code: 8 33 65 46 100

LED

2700 K
 CRI ≥ 90
 L80 / 55000h
 2 SDCM


ELECTRICAL

phase-cut dim
 220 - 240 V
 Total connected power 15.3 W
 Class 1


PHYSICAL

Length 226 mm
 Width 65 mm
 Height 75 mm
 0.56 kg


^a Color may deviate slightly due to production conditions.

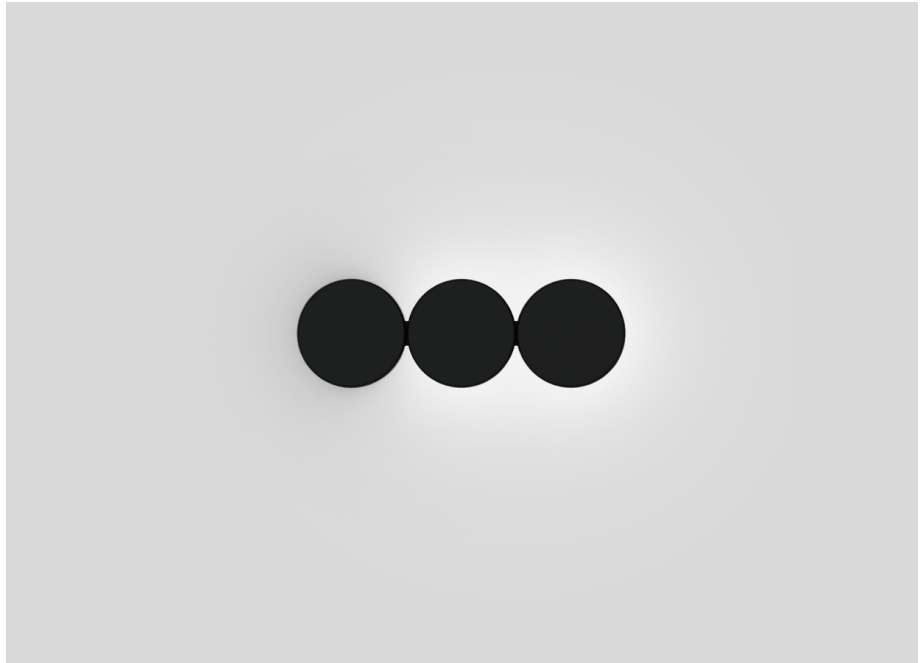

Wall surface luminaire made from aluminium; surface Black Matt; powder coated, matt texture; RAL 9005; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; 220 - 240 V; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;



LIGHT DISTRIBUTION



[330264B3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré apply.
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

DOT
3.0

330264B3