

Project	
Type	
Notes	
Quantity	
Date	

**GENERAL**

Wall , Surface  
 Bronze  
 IP20  
 Interior  
 Output: 1210 lm  
 CIE flux code: 10 35 66 47 100

**LED**


2700 K  
 CRI ≥ 90  
 L80 / 55000h  
 2 SDCM

**ELECTRICAL**


phase-cut dim  
 220 - 240 V  
 Total connected power 21.1 W  
 Class 1

**PHYSICAL**


Length 301 mm  
 Width 65 mm  
 Height 75 mm  
 0.73 kg

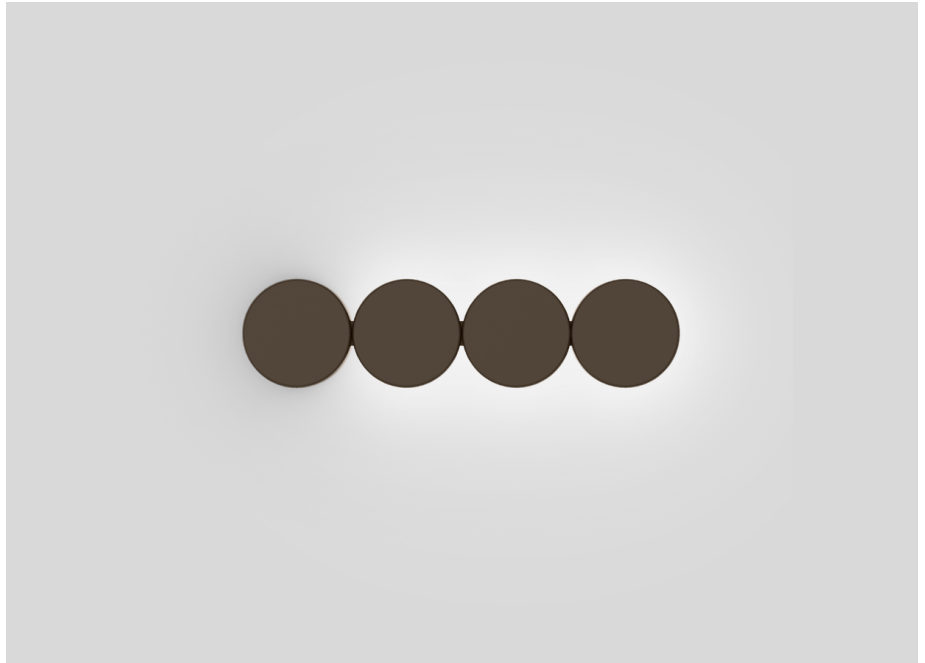

Wall surface luminaire made from aluminium; surface Bronze; wet painted, matt smooth; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; 220 - 240 V; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;



**LIGHT DISTRIBUTION**

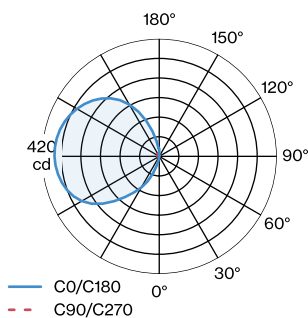



WEVER & DUCRÉ  
LIGHTING

**DOT**  
4.0

330464Q3