



WEVER & DUCRÉ
LIGHTING

FINLIN WALL 1.0

370584K3

Project

Type

Notes

Quantity

Date

GENERAL

Wall , Surface

Black Matt + Gold

RAL 9005^a

IP20

Interior

Output: 350 lm

CIE flux code: 11 35 66 50 100

LED

2700 K

3 SDCM

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 6.0 W

Class 1


PHYSICAL

Diameter 9 mm


Height 623 mm

0.15 kg

^a Color may deviate slightly due to production conditions.

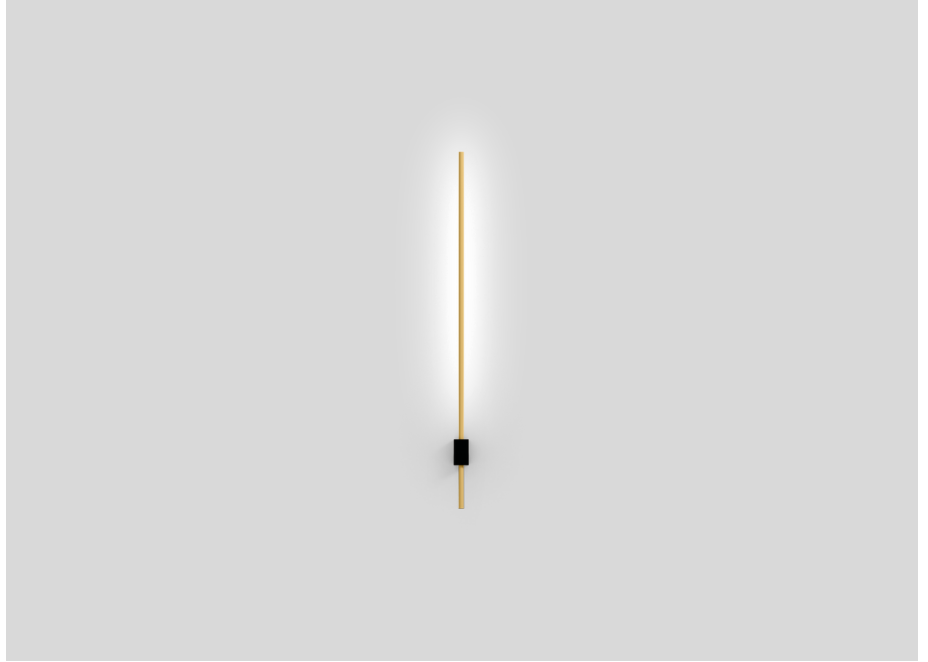

Wall surface luminaire made from aluminium; surface Black Matt + Gold; wet painted, matt smooth; RAL 9005; opal PMMA diffuser; PCB 3-step binning; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90 ; CRI (Colour Rendering Index) ≥ 90 ; 220 - 240 V; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;





WEVER & DUCRÉ
LIGHTING

FINLIN WALL 1.0

370584K3

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.93	0.89	0.86	0.83
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

MOUNTING

wall-/base-spacer

TYPE	L · W · H (MM)	ORDERCODE
FINLIN	45 · 26 · 18	9 0 0 1 9 5 B 0