



WEVER & DUCRÉ  
LIGHTING

# FINLIN WALL 4.0

370884B3

Project

Type

Notes

Quantity

Date

## GENERAL

Wall , Surface

Black Matt

RAL 9005<sup>a</sup>

IP20

Interior

Output: 700 lm

CIE flux code: 11 35 66 50 100

## LED

2700 K

3 SDCM

## ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 10.0 W

Class 1


## PHYSICAL

Diameter 665 mm


Height 649 mm

0.2 kg

<sup>a</sup> Color may deviate slightly due to production conditions.

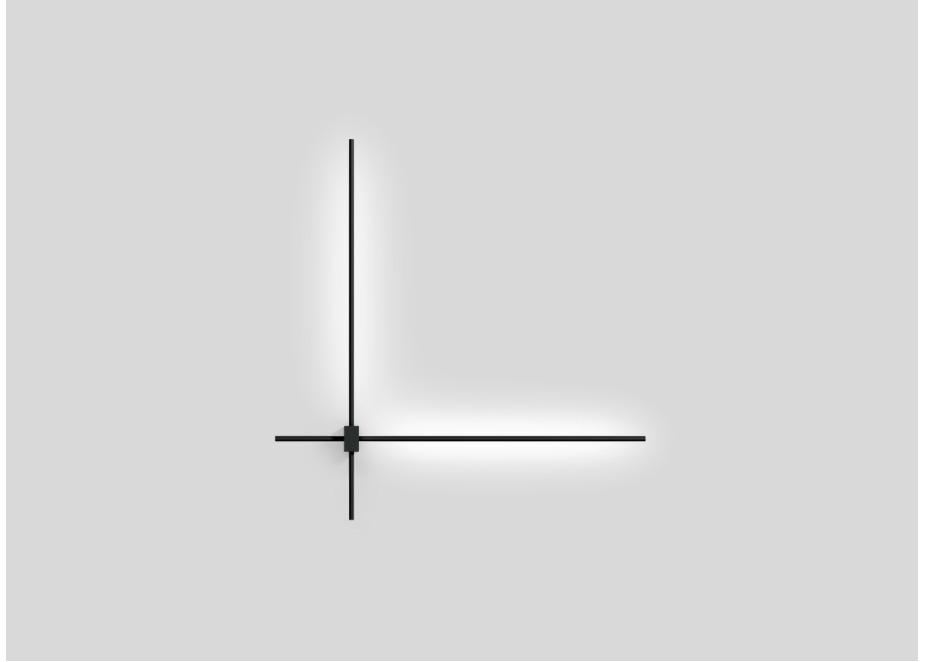

Wall surface luminaire made from aluminium; surface Black Matt; powder coated, matt texture; RAL 9005; opal PMMA diffuser; PCB 3-step binning; phase-cut dim; light colour 2700 K; binning initial MacAdam  $\leq 3$  SDCM; CRI  $\geq 90$ ; CRI (Colour Rendering Index)  $\geq 90$ ; 220 - 240 V; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;





**WEVER & DUCRÉ**  
LIGHTING

# FINLIN WALL 4.0

370884B3

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.96	0.93	0.89	0.86	0.83
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## MOUNTING

### wall-/base-spacer

TYPE	L · W · H (MM)	ORDERCODE
FINLIN	45 · 26 · 18	9 0 0 1 9 5 B 0