



FEATURES

- 4 different sharp beam angles
- Wide variety of TM30 optimized LEDs
- ENEC approved drivers
- IEEE P1789 Flickerfree driver to 1%

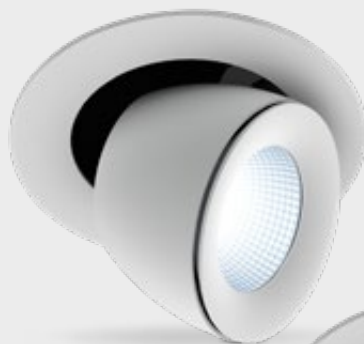

LV 18° / 37° / 60°

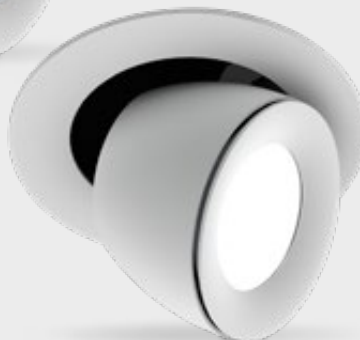

LV 80° (on request)

COLOURS

Available colours:



Matt white RAL 9016 (XX=MW)
Matt black RAL 9005 (XX=BL)

SPRINGS

Standard with CS springs (concrete/gyproc).
Also available with GS springs (gyproc).

Linea DS-A 195 LV

Adjustable

SPECIFICATIONS


Beam angle (FWHM)	18° / 37° / 60° (80° on request)
Fixture material	Die cast aluminium / Glass
Environment	Indoor
IP rate	IP20
IK rate	IK09
Operating temperature (Ta)	-20°C / +45°C ¹
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 Years
Energy class	These products contains a light source of energy efficiency class F (CRI97 3000K) / D (CRI80 3000K/4000K)

This luminaire contains built-in LED lamps. The lamps cannot be changed in the luminaire. EU 874/2012

¹ In applications with a flat roof (f.i. car showrooms) the temperatures may exceed 45°C. Please ask our sales office for a special driver.



Ask our sales department about the possibilities for:
- Tunable white 2700-6500K.
- Extra LED options from the LUXEON Stylist Series



LINEA DS-A 195 VARIATIONS


Linea DS-A 195	CRI80	3000/4000K	3000/3400Lm	incl. power supply	page 3
Linea DS-A 195	CRI80	3000/4000K	5000/5700Lm	incl. power supply	page 4
Linea DS-A 195	CRI97	3000K	2500Lm	incl. power supply	page 5
Linea DS-A 195	CRI97	3000K	3250/3750Lm	incl. power supply	page 6

CRI80/97 CHOOSE YOUR LV LUMEN OUTPUT

	mA	W	Lumen Output			Lumen / Watt			Driver types				
			CRI80	CRI80	CRI97	CRI80	CRI80	CRI97	No dim	Triac	1-10V&Push	Dali	Casambi
			3000K	4000K	3000K	3000K	4000K	3000K					
<i>Special request</i>	250	9,4	1200	1400	800	127	149	85	127570	x	126421	127576	x
<i>Special request</i>	350	13,2	1650	1900	1100	125	144	83	127570	x	127021	127576	127630
<i>Special request</i>	500	17,9	2250	2500	1450	125	139	81	127570	127032	127021	127576	127630
Standard	700	27,0	3000	3400	2150	111	126	80	127480N	122260	127021	127576	127630
<i>Special request</i>	800	32,1	3400	3750	2500	106	117	78	127484	on request	127021	127490	127630
<i>Special request</i>	900	35,5	3700	4100	2700	104	115	76	127484	on request	127021	127490	127630
<i>Special request</i>	1050	41,7	4200	4700	3000	101	113	72	127484	on request	127021	127490	127630
Standard	1200	50,5	5000	5700	3250 ¹	99	113	64	127690	on request	123170	123170	On request
Special request	1400	57,2	5600	6300	3750 ²	98	110	66	x	on request	123170	123170	On request

¹ For large downlights CRI97 No dim. ² For large downlights CRI97 1-10V and Dali

DIMENSIONS



HOLE SIZE



Using CS springs: Ø 195 mm.
Thickness ceiling 5-135 mm & recess depth 135 mm. For plasterboard ceilings or similar harder materials. Turn the ring on the front counterclockwise after installation.



Using GS springs: Ø 195 mm.
Thickness ceiling 1-135 mm & recess depth 135 mm. For soft ceiling tiles we recommend using a wooden plate or a ceiling ring on the reverse side of the tile.

LINEA DS-A 195 LV

CRI80 3000/3400LM

ITEM SPECIFICATIONS (PART A)

Description	Item code		UGR	Type	mA	Vf
	CS	GS				
Linea DS-A LV 3000 Lm 3000K CRI80 18° No dim	130603XXCA02	130603XXGA02	18.0	Incl. PSU	700	37,5
Linea DS-A LV 3000 Lm 3000K CRI80 18° 1-10V & Push	130603XXNA02	130603XXUA02	18.0	Incl. PSU	700	37,5
Linea DS-A LV 3000 Lm 3000K CRI80 18° Dali	130603XXPA02	130603XXVA02	18.0	Incl. PSU	700	37,5
Linea DS-A LV 3000 Lm 3000K CRI80 37° No dim	130603XXCB02	130603XXGB02	17.4	Incl. PSU	700	37,5
Linea DS-A LV 3000 Lm 3000K CRI80 37° 1-10V & Push	130603XXNB02	130603XXUB02	17.4	Incl. PSU	700	37,5
Linea DS-A LV 3000 Lm 3000K CRI80 37° Dali	130603XXPB02	130603XXVB02	17.4	Incl. PSU	700	37,5
Linea DS-A LV 3000 Lm 3000K CRI80 60° No dim	130603XXCC02	130603XXGC02	20.5	Incl. PSU	700	37,5
Linea DS-A LV 3000 Lm 3000K CRI80 60° 1-10V & Push	130603XXNC02	130603XXUC02	20.5	Incl. PSU	700	37,5
Linea DS-A LV 3000 Lm 3000K CRI80 60° Dali	130603XXPC02	130603XXVC02	20.5	Incl. PSU	700	37,5
Linea DS-A LV 3400 Lm 4000K CRI80 18° No dim	130603XXCD02	130603XXGD02	18.4	Incl. PSU	700	37,5
Linea DS-A LV 3400 Lm 4000K CRI80 18° 1-10V & Push	130603XXND02	130603XXUD02	18.4	Incl. PSU	700	37,5
Linea DS-A LV 3400 Lm 4000K CRI80 18° Dali	130603XXPD02	130603XXVD02	18.4	Incl. PSU	700	37,5
Linea DS-A LV 3400 Lm 4000K CRI80 37° No dim	130603XXCE02	130603XXGE02	17.9	Incl. PSU	700	37,5
Linea DS-A LV 3400 Lm 4000K CRI80 37° 1-10V & Push	130603XXNE02	130603XXUE02	17.9	Incl. PSU	700	37,5
Linea DS-A LV 3400 Lm 4000K CRI80 37° Dali	130603XXPE02	130603XXVE02	17.9	Incl. PSU	700	37,5
Linea DS-A LV 3400 Lm 4000K CRI80 60° No dim	130603XXCF02	130603XXGF02	20.9	Incl. PSU	700	37,5
Linea DS-A LV 3400 Lm 4000K CRI80 60° 1-10V & Push	130603XXNF02	130603XXUF02	20.9	Incl. PSU	700	37,5
Linea DS-A LV 3400 Lm 4000K CRI80 60° Dali	130603XXPF02	130603XXVF02	20.9	Incl. PSU	700	37,5

ITEM SPECIFICATIONS (PART B)

Description	W	Lm	Lm/W	CRI (typ.)	Pf	Ripple	Inrush current	B-16A Fuse	Safety class	Energy class
Linea DS-A LV 3000 Lm 3000K CRI80 No dim	27,0	3000	111	82	0.95	<3%	5A 50µS	50 pcs	I	D
Linea DS-A LV 3000 Lm 3000K CRI80 1-10V & Push	27,0	3000	111	82	0.95	<3%	5A 50µS	50 pcs	II	D
Linea DS-A LV 3000 Lm 3000K CRI80 Dali	27,0	3000	111	82	0.95	<3%	5A 50µS	50 pcs	II	D
Linea DS-A LV 3400 Lm 4000K CRI80 No dim	27,0	3400	126	82	0.95	<3%	5A 50µS	50 pcs	I	D
Linea DS-A LV 3400 Lm 4000K CRI80 1-10V & Push	27,0	3400	126	82	0.95	<3%	5A 50µS	50 pcs	II	D
Linea DS-A LV 3400 Lm 4000K CRI80 Dali	27,0	3400	126	82	0.95	<3%	5A 50µS	50 pcs	II	D

ITEM SPECIFICATIONS (PART C)

Description	Weight	Dimensions single carton	Quantity per carton	Expected lifespan B10 reported (25°C)		
				L70B10	L80B10	L90B10
Linea DS-A LV CRI80	2094 gr	210x210x140 mm	6 pcs	>60.500 hrs	>60.500 hrs	>60.500 hrs

All values are measured at 230V (+/- 7%)

LINEA DS-A 195 LV

CRI80 5000/5700LM

ITEM SPECIFICATIONS (PART A)

Description	Item code		UGR	Type	mA	Vf
	CS	GS				
Linea DS-A LV 5000 Lm 3000K CRI80 18° No dim	130603XXCR02	130603XXGR02	19.7	Incl. PSU	1200	37,5
Linea DS-A LV 5000 Lm 3000K CRI80 18° 1-10V & Push	130603XXNK02	130603XXUK02	19.7	Incl. PSU	1200	37,5
Linea DS-A LV 5000 Lm 3000K CRI80 18° Dali	130603XXPK02	130603XXVK02	19.7	Incl. PSU	1200	37,5
Linea DS-A LV 5000 Lm 3000K CRI80 37° No dim	130603XXCS02	130603XXGS02	19.2	Incl. PSU	1200	37,5
Linea DS-A LV 5000 Lm 3000K CRI80 37° 1-10V & Push	130603XXNL02	130603XXUL02	19.2	Incl. PSU	1200	37,5
Linea DS-A LV 5000 Lm 3000K CRI80 37° Dali	130603XXPL02	130603XXVL02	19.2	Incl. PSU	1200	37,5
Linea DS-A LV 5000 Lm 3000K CRI80 60° No dim	130603XXCT02	130603XXGT02	22.2	Incl. PSU	1200	37,5
Linea DS-A LV 5000 Lm 3000K CRI80 60° 1-10V & Push	130603XXNM02	130603XXUM02	22.2	Incl. PSU	1200	37,5
Linea DS-A LV 5000 Lm 3000K CRI80 60° Dali	130603XXPM02	130603XXVM02	22.2	Incl. PSU	1200	37,5
Linea DS-A LV 5700 Lm 4000K CRI80 18° No dim	130603XXCU02	130603XXGU02	20.2	Incl. PSU	1200	37,5
Linea DS-A LV 5700 Lm 4000K CRI80 18° 1-10V & Push	130603XXNN02	130603XXUN02	20.2	Incl. PSU	1200	37,5
Linea DS-A LV 5700 Lm 4000K CRI80 18° Dali	130603XXPN02	130603XXVN02	20.2	Incl. PSU	1200	37,5
Linea DS-A LV 5700 Lm 4000K CRI80 37° No dim	130603XXCV02	130603XXGV02	19.7	Incl. PSU	1200	37,5
Linea DS-A LV 5700 Lm 4000K CRI80 37° 1-10V & Push	130603XXNP02	130603XXUP02	19.7	Incl. PSU	1200	37,5
Linea DS-A LV 5700 Lm 4000K CRI80 37° Dali	130603XXPP02	130603XXVP02	19.7	Incl. PSU	1200	37,5
Linea DS-A LV 5700 Lm 4000K CRI80 60° No dim	130603XXCW02	130603XXGW02	22.7	Incl. PSU	1200	37,5
Linea DS-A LV 5700 Lm 4000K CRI80 60° 1-10V & Push	130603XXNQ02	130603XXUQ02	22.7	Incl. PSU	1200	37,5
Linea DS-A LV 5700 Lm 4000K CRI80 60° Dali	130603XXPQ02	130603XXVQ02	22.7	Incl. PSU	1200	37,5

ITEM SPECIFICATIONS (PART B)

Description	W	Lm	Lm/W	CRI (typ.)	Pf	Ripple	Inrush current	B-16A Fuse	Safety class	Energy class
Linea DS-A LV 5000 Lm 3000K CRI80 No dim	50,5	5000	99	82	0.95	<3%	10A 200µs	30 pcs	II	D
Linea DS-A LV 5000 Lm 3000K CRI80 1-10V & Push	50,5	5000	99	82	0.95	<3%	10A 200µs	30 pcs	I	D
Linea DS-A LV 5000 Lm 3000K CRI80 Dali	50,5	5000	99	82	0.95	<3%	10A 200µs	30 pcs	I	D
Linea DS-A LV 5700 Lm 4000K CRI80 No dim	50,5	5700	113	82	0.95	<3%	10A 200µs	30 pcs	II	D
Linea DS-A LV 5700 Lm 4000K CRI80 1-10V & Push	50,5	5700	113	82	0.95	<3%	10A 200µs	30 pcs	I	D
Linea DS-A LV 5700 Lm 4000K CRI80 Dali	50,5	5700	113	82	0.95	<3%	10A 200µs	30 pcs	I	D

ITEM SPECIFICATIONS (PART C)

Description	Weight	Dimensions single carton	Quantity per carton	Expected lifespan B10 reported (25°C)		
				L70B10	L80B10	L90B10
Linea DS-A LV CRI80	2094 gr	210x210x140 mm	6 pcs	>60.500 hrs	>60.500 hrs	>60.500 hrs

All values are measured at 230V (+/- 7%)

LINEA DS-A 195 LV

CRI97 2500LM

ITEM SPECIFICATIONS (PART A)

Description	Item code		UGR	Type	mA	Vf
	CS	GS				
Linea DS-A LV 2500 Lm 3000K CRI80 18° No dim	130603XXCG02	130603XXGG02	17.3	Incl. PSU	800	37,5
Linea DS-A LV 2500 Lm 3000K CRI80 18° 1-10V & Push	130603XXNG02	130603XXUG02	17.3	Incl. PSU	800	37,5
Linea DS-A LV 2500 Lm 3000K CRI80 18° Dali	130603XXPG02	130603XXVG02	17.3	Incl. PSU	800	37,5
Linea DS-A LV 2500 Lm 3000K CRI80 37° No dim	130603XXCH02	130603XXGH02	16.8	Incl. PSU	800	37,5
Linea DS-A LV 2500 Lm 3000K CRI80 37° 1-10V & Push	130603XXNH02	130603XXUH02	16.8	Incl. PSU	800	37,5
Linea DS-A LV 2500 Lm 3000K CRI80 37° Dali	130603XXPH02	130603XXVH02	16.8	Incl. PSU	800	37,5
Linea DS-A LV 2500 Lm 3000K CRI80 60° No dim	130603XXCJ02	130603XXGJ02	19.8	Incl. PSU	800	37,5
Linea DS-A LV 2500 Lm 3000K CRI80 60° 1-10V & Push	130603XXNJ02	130603XXUJ02	19.8	Incl. PSU	800	37,5
Linea DS-A LV 2500 Lm 3000K CRI80 60° Dali	130603XXPJ02	130603XXPJ02	19.8	Incl. PSU	800	37,5

ITEM SPECIFICATIONS (PART B)

Description	W	Lm	Lm/W	CRI (typ.)	Pf	Ripple	Inrush current	B-16A Fuse	Safety class	Energy class
Linea DS-A LV 2500 Lm 3000K CRI97 No dim	32,1	2500	78	97	0.95	<3%	5A 50µS	50 pcs	I	F
Linea DS-A LV 2500 Lm 3000K CRI97 1-10V & Push	32,1	2500	78	97	0.95	<3%	5A 50µS	50 pcs	II	F
Linea DS-A LV 2500 Lm 3000K CRI97 Dali	32,1	2500	78	97	0.95	<3%	5A 50µS	50 pcs	II	F

ITEM SPECIFICATIONS (PART C)

Description	Weight	Dimensions single carton	Quantity per carton	Expected lifespan B10 reported (25°C)		
				L70B10	L80B10	L90B10
Linea DS-A LV 2500 Lm 3000K CRI97	2094 gr	210x210x140 mm	6 pcs	>60.500 hrs	>60.500 hrs	>60.500 hrs

All values are measured at 230V (+/- 7%)

LINEA DS-A 195 LV

CRI97 3750LM

ITEM SPECIFICATIONS (PART A)

Description	Item code		UGR	Type	mA	Vf
	CS	GS				
Linea DS-A LV 3250 Lm 3000K CRI80 18° No dim	130603XXFD02	130603XXFK02	18.2	Incl. PSU	1200	37,5
Linea DS-A LV 3750 Lm 3000K CRI80 18° 1-10V & Push	130603XXNR02	130603XXUR02	18.7	Incl. PSU	1400	37,5
Linea DS-A LV 3750 Lm 3000K CRI80 18° Dali	130603XXPR02	130603XXVR02	18.7	Incl. PSU	1400	37,5
Linea DS-A LV 3250 Lm 3000K CRI80 37° No dim	130603XXFE02	130603XXFL02	17.7	Incl. PSU	1200	37,5
Linea DS-A LV 3750 Lm 3000K CRI80 37° 1-10V & Push	130603XXNS02	130603XXUS02	18.2	Incl. PSU	1400	37,5
Linea DS-A LV 3750 Lm 3000K CRI80 37° Dali	130603XXPS02	130603XXVS02	18.2	Incl. PSU	1400	37,5
Linea DS-A LV 3250 Lm 3000K CRI80 60° No dim	130603XXFF02	130603XXFM02	20.7	Incl. PSU	1200	37,5
Linea DS-A LV 3750 Lm 3000K CRI80 60° 1-10V & Push	130603XXNT02	130603XXUT02	21.2	Incl. PSU	1400	37,5
Linea DS-A LV 3750 Lm 3000K CRI80 60° Dali	130603XXPT02	130603XXVT02	21.2	Incl. PSU	1400	37,5

ITEM SPECIFICATIONS (PART B)

Description	W	Lm	Lm/W	CRI (typ.)	Pf	Ripple	Inrush current	B-16A Fuse	Safety class	Energy class
Linea DS-A LV 3250 Lm 3000K CRI97 No dim	50,5	3250	64	97	0.95	<3%	10A 200µS	30 pcs	II	F
Linea DS-A LV 3750 Lm 3000K CRI97 1-10V & Push	57,2	3750	66	97	0.95	<3%	10A 200µS	30 pcs	I	F
Linea DS-A LV 3750 Lm 3000K CRI97 Dali	57,2	3750	66	97	0.95	<3%	10A 200µS	30 pcs	I	F

ITEM SPECIFICATIONS (PART C)

Description	Weight	Dimensions single carton	Quantity per carton	Expected lifespan B10 reported (25°C)		
				L70B10	L80B10	L90B10
Linea DS-A LV 3250/3750 Lm 3000K CRI97	2094 gr	210x210x140 mm	6 pcs	>60.500 hrs	>60.500 hrs	>60.500 hrs

All values are measured at 230V (+/- 7%)

NEW STANDARDS REQUIRE NEW LEDS

TM-30 (new color norm): The Illuminating Engineering Society (IES) has published a new Technical Memorandum – TM-30-15 entitled “IES Method for Evaluating Light Source Color Rendition” – that promises to supplant CRI as a color metric. TM-30 relies on separate fidelity and gamut metrics, as well as a set of color samples that is more representative of real-world objects, as opposed to the pastel samples that were primarily used for the baseline CRI metric that was sometimes called Ra. The new color metric is intended to fairly and accurately characterize both LED-based solid-state lighting (SSL) and legacy sources.



Desaturated

CRI = 80 / R_g = 92






Red-Enhanced

CRI = 98 / R_g = 103

SPECIAL LEDS AVAILABLE




	CCT	CRI	R9	RF	RG	R15	TLCI	DOWNLIGHTS SMALL		DOWNLIGHTS LARGE		DOWNLIGHTS LARGE		ITEM CODE
								MA	LM	MA	LM	MA	LM	
CRI80	2700K	82	5	82	92	75	69	350 mA	1550	700 mA	2900	1200 mA	4800	51-4028-27-1
CRI80	3000K	82	5	81	93	75	66	350 mA	1625	700 mA	3000	1200 mA	5000	51-4028-30-1
CRI80	4000K	82	5	81	93	74	66	350 mA	1700	700 mA	3400	1200 mA	5700	51-4028-40-1
CRI97	2700K	97	93	96	103	99	97	350 mA	1150	800 mA	x	1400 mA	x	50-3031-27
CRI97	3000K	97	96	95	103	100	97	350 mA	1250	800 mA	2500	1400 mA	3750	50-3031-30
CRI97	4000K	97	96	95	103	100	97	350 mA	1350	800 mA	x	1400 mA	x	50-3031-40
CrispWhite	3000K	90	61	87	102	89	83	350 mA	780	900 mA	2300	1400 mA	3550	51-4029-30
Red Meat	1800K	82	81	77	119	95	60	350 mA	515	900 mA	1750	1400 mA	2350	51-4042-00
Bread & Pastries	2700K	92	54	89	96	86	91	350 mA	770	900 mA	2600	1400 mA	3500	51-4045-00

2700K

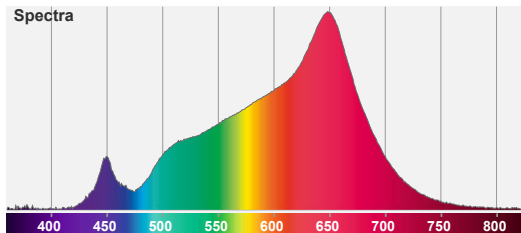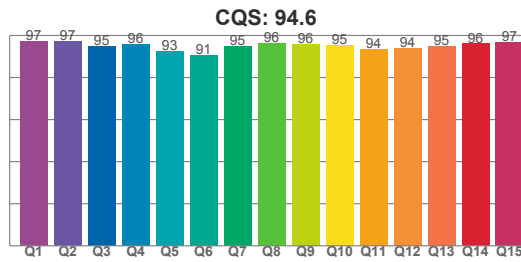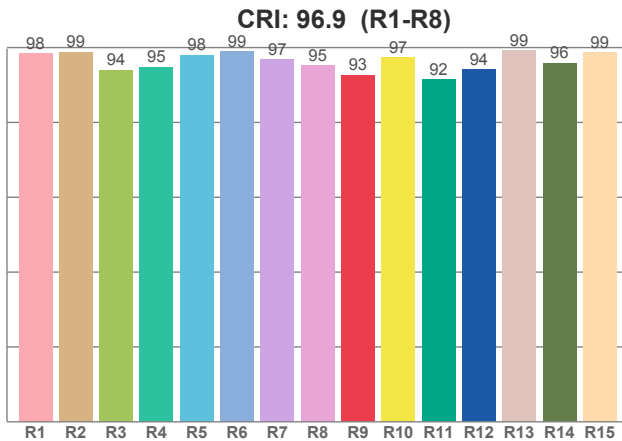




CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS
2700K	96.9	92.7	96.0	102.6	94.6

3000K

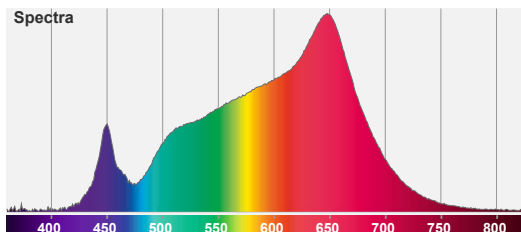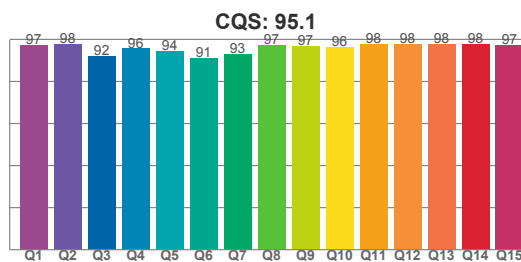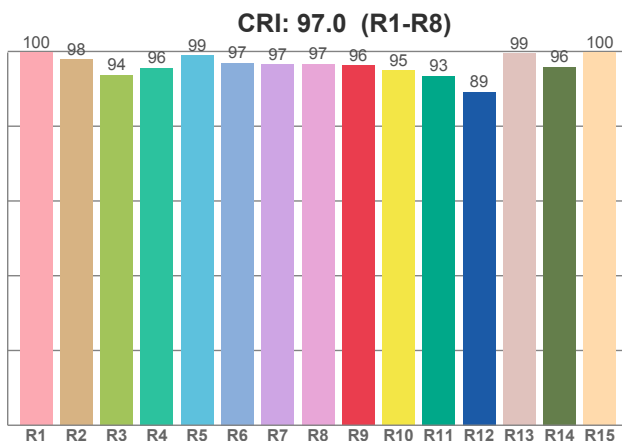

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS
3000 K	97.0	96.2	95.0	103.3	95.1

4000K

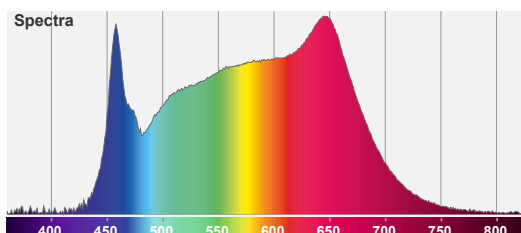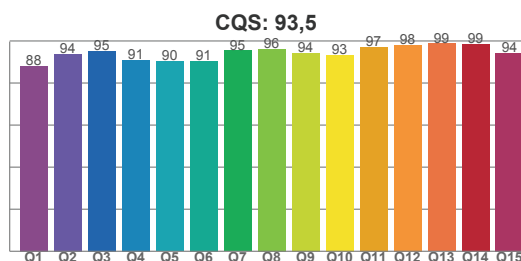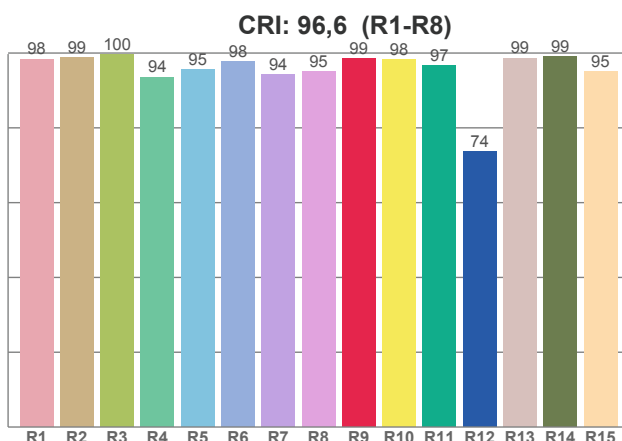

CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS
4000K	96.6	98.5	88.3	96.2	93.5