



WEVER & DUCRÉ
LIGHTING

LUNA ROUND IP44 1.0

114881W5

Project
Type
Notes
Quantity
Date

GENERAL

Ceiling , Recessed
 White Matt
 RAL 9010 ^a
 Front IP44
 Back IP20
 Interior
 Output: 580 lm

LED

3000 K
 3 SDCM

OPTICAL

Opal ,

ELECTRICAL

excl. driver
 18 V
 LED Inset 6.0 W
 Class 3




PHYSICAL

Diameter 92 mm
 Height 36 mm
 0.12 kg
 blade springs

CUTOUT

Diameter 76-79 mm
 Min. ceiling thickness 12 mm
 Recessed depth 50 mm

^a Color may deviate slightly due to production conditions.

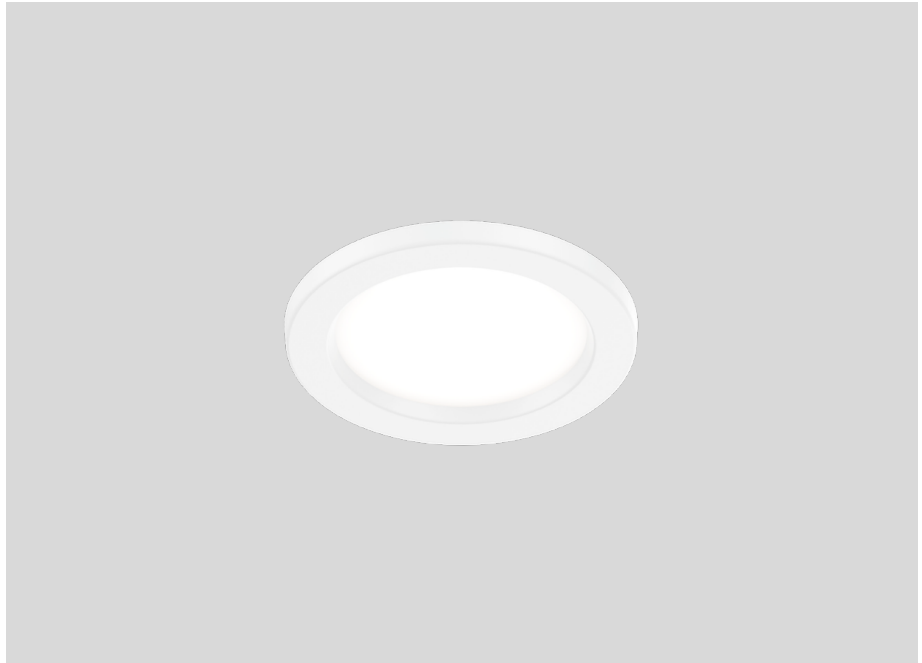



WEVER & DUCRÉ
LIGHTING

LUNA ROUND IP44 1.0

114881W5

ELECTRICAL

Driver

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
6W 350mA	67·39·22	8.6-18V	9 0 2 1 3 3 0 3
10W 350mA 1-10V dim	101.5·51·29.5	14-28V	9 0 2 2 3 4 0 1
10W 350mA phase-cut dim	102·38·21	12-28V	9 0 2 2 3 4 0 2
10W 350mA	115·41·25	13-26V	9 0 2 2 3 4 0 6
14W 350mA	145·33·21	2.5-42V	9 0 2 4 3 5 0 1
17W 350mA 10-49V DALI	108·52·22	10-49V	9 0 2 4 3 6 0 1