



WEVER & DUCRÉ  
LIGHTING

# MATCH point 1.0

191161B3

Project \_\_\_\_\_

Type \_\_\_\_\_

Notes \_\_\_\_\_

Quantity \_\_\_\_\_

Date \_\_\_\_\_

## GENERAL

Ceiling \_\_\_\_\_

Recessed \_\_\_\_\_

Black Matt \_\_\_\_\_

IP20 \_\_\_\_\_

Interior \_\_\_\_\_

300 lm \_\_\_\_\_

## LED

2700 K \_\_\_\_\_

## OPTICAL

Beam angle 32° \_\_\_\_\_

## ELECTRICAL

excl. driver \_\_\_\_\_

18 V \_\_\_\_\_

Total connected power 5.0 W \_\_\_\_\_

LED Inset 5.0 W \_\_\_\_\_

Class 3 \_\_\_\_\_

250 mA \_\_\_\_\_

Safety distance 0.3 m \_\_\_\_\_

## PHYSICAL

Diameter 45 mm \_\_\_\_\_

Height 42 mm \_\_\_\_\_

0.6 kg \_\_\_\_\_

wire springs \_\_\_\_\_



## CUTOUT

Diameter 38-41 mm \_\_\_\_\_

Min. ceiling thickness 4 mm \_\_\_\_\_

Max. ceiling thickness 25 mm \_\_\_\_\_

Recessed depth 85 mm \_\_\_\_\_

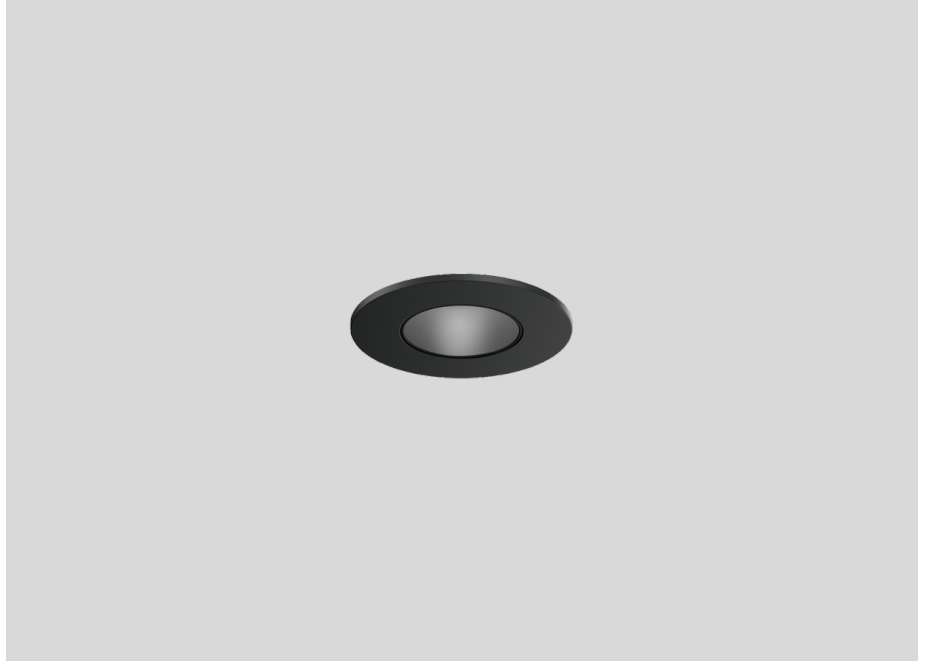



WEVER & DUCRÉ  
LIGHTING

# MATCH point 1.0

191161B3

## ELECTRICAL

### Driver

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
7.2W   250mA   16-29V   phase-cut dim	122·41·23	16 - 29V	9 0 2 2 6 4 0 1
10W   250mA   6-40V   DALI	124·31·21	6 - 40V	9 0 2 4 9 4 0 2