



WEVER & DUCRÉ
LIGHTING

MATCH

point IP44 1.0

191261W5

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling, Recessed

White Matt

Front IP44

Back IP20

Interior

Output: 325 lm

CIE flux code: 98 99 100 100 100

LED

3000 K

CRI ≥ 90

L80 / 50000h

2 SDCM

OPTICAL

Beam angle 32°

ELECTRICAL

excl. driver

18 V

LED Inset 4.2 W

Class 3

250 mA

PHYSICAL

Diameter 45 mm

Height 42 mm

0.06 kg

wire springs



CUTOUT

Diameter 40-41 mm

Min. ceiling thickness 4 mm

Max. ceiling thickness 25 mm


Recessed depth 68 mm

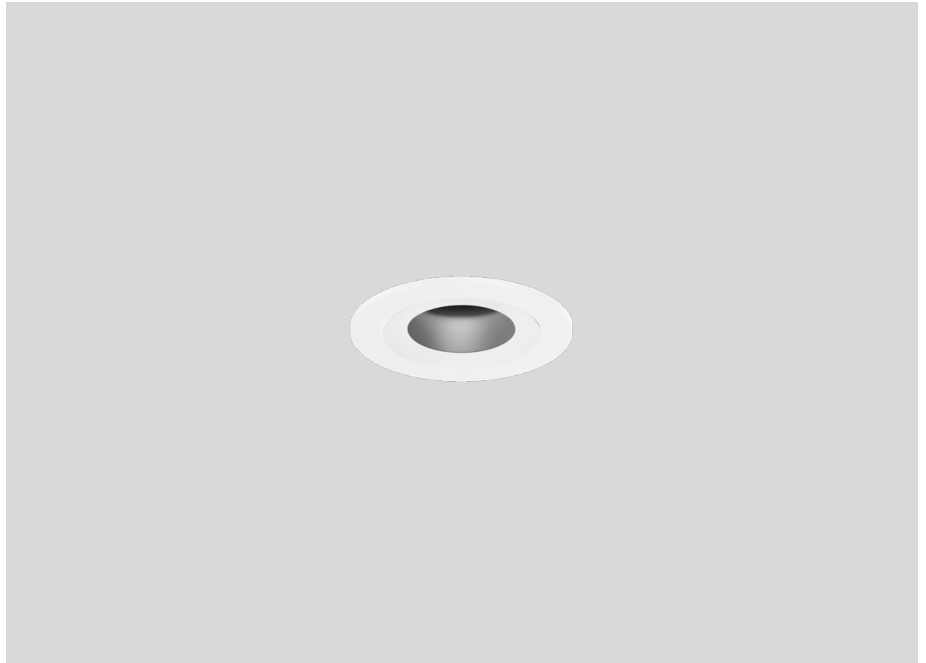

Round ceiling recessed downlight made from die-cast aluminium; with trim; surface White Matt; powder coated, matt texture; installation without tools using wire springs; suitable for ceiling thickness of 4-25 mm; recessed depth 68 mm; with COB (Chip on Board) technology for maximum efficiency; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; beam angle 32°; degree of protection IP44; PC3; driver not included; light source not replaceable;



LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

MATCH

point IP44 1.0

191261W5

CONE DIAGRAM

250mA 31°

h (m)	E0° (lx)	ø (m)
1	990	0.56
2	248	1.13
3	110	1.69
4	62	2.26
5	40	2.82

ELECTRICAL

Driver

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
6W 250mA	115 · 41 · 25	13-26V	9 0 2 2 6 2 0 1
7.2W 250mA 16-29V phase-cut dim	122 · 41 · 23	16-29V	9 0 2 2 6 4 0 1
13W 250mA	144 · 33 · 21	2.5-52V	9 0 2 4 6 5 0 1
10W 250mA 6-40V DALI	124 · 31 · 21	6-40V	9 0 2 4 9 4 0 2