



WEVER & DUCRÉ
LIGHTING

MATCH

point trimless 1.0

191861B3

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling

Recessed

Black Matt

IP20

Interior

270 lm

LED

2700 K

OPTICAL

Beam angle 32°

ELECTRICAL

excl. driver

18 V

Total connected power 5.0 W

LED Inset 5.0 W

Class 3

250 mA

Safety distance 0.3 m

PHYSICAL

Diameter 26 mm

Height 48 mm

0.8 kg


CUTOUT

Diameter 45-47 mm

Min. ceiling thickness 4 mm

Max. ceiling thickness 26 mm

Recessed depth 60 mm

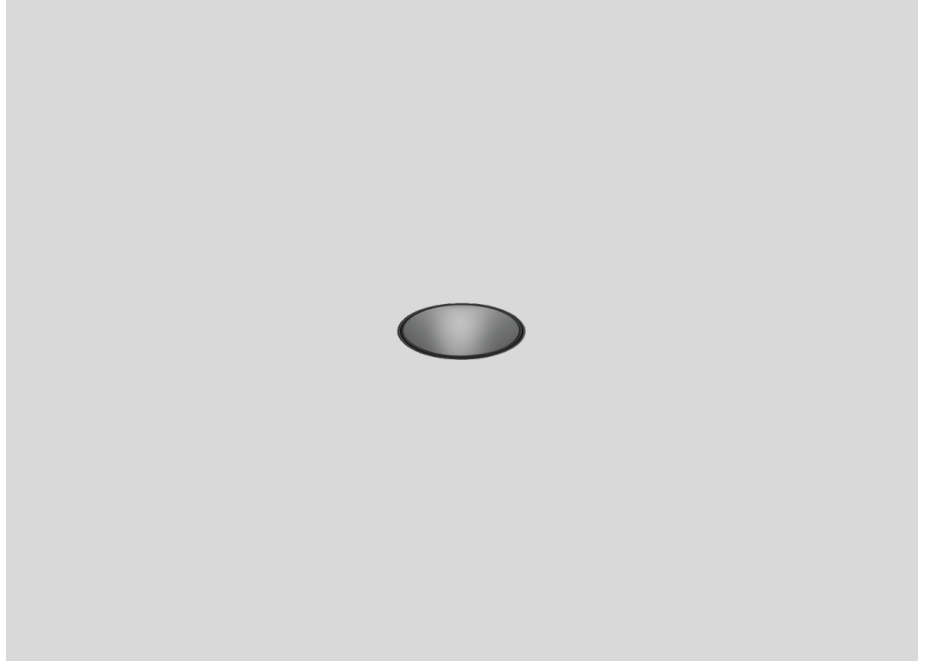



WEVER & DUCRÉ
LIGHTING

MATCH

point trimless 1.0

191861B3

ELECTRICAL

Driver

TYPE	L · W · H (MM)	VOLTAGE	ORDERCODE
7.2W 250mA 16-29V phase-cut dim	122·41·23	16 - 29V	9 0 2 2 6 4 0 1
10W 250mA 6-40V DALI	124·31·21	6 - 40V	9 0 2 4 9 4 0 2