



WEVER & DUCRÉ  
LIGHTING

# MATCH SURFACE 1.0

177154B3

Project
Type
Notes
Quantity
Date

## GENERAL

Ceiling , Surface  
 Tilt max 90°  
 Rotation 350°  
 Black Matt  
 RAL 9005<sup>a</sup>  
 IP20  
 Interior  
 Output: 550 lm  
 CIE flux code: 97 100 100 100 100

## LED

2700 K  
 CRI ≥ 90  
 L80 / 50000h  
 2 SDCM

## OPTICAL

Beam angle 30°


## ELECTRICAL

phase-cut dim  
 220 - 240 V  
 Total connected power 8.7 W  
 Class 1


## PHYSICAL

Length 140 mm  
 Width 26 mm  
 Height 117 mm  
 0.24 kg


<sup>a</sup> Color may deviate slightly due to production conditions.

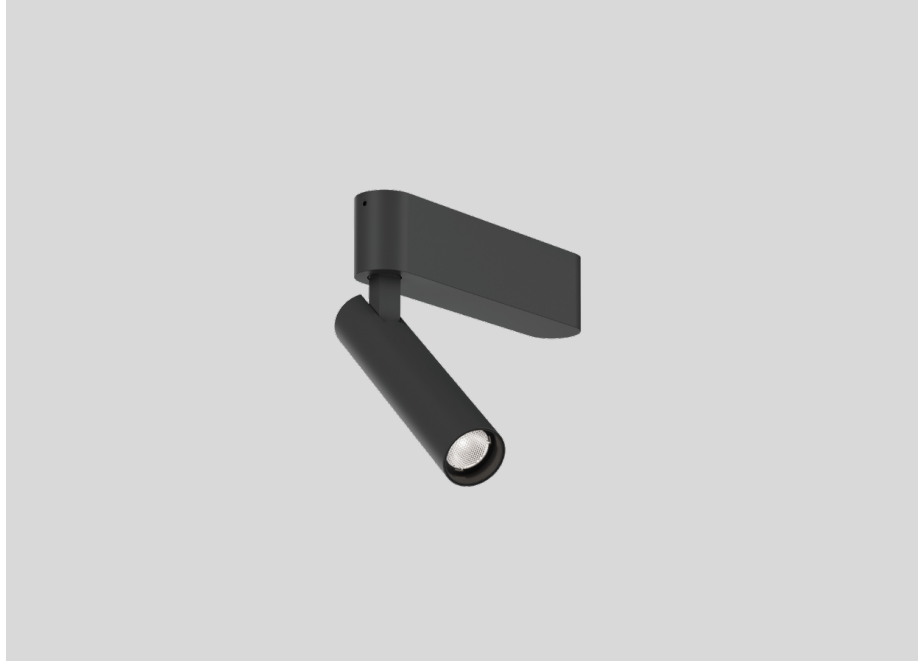

Ceiling surface spotlight made from die-cast aluminium; surface Black Matt; powder coated, matt texture; RAL 9005; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; beam angle 30°; 350° rotatable and 90° tiltable; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



## LIGHT DISTRIBUTION





WEVER & DUCRÉ  
LIGHTING

# MATCH SURFACE 1.0

177154B3

## CONE DIAGRAM

31°

h (m)	E0° (lx)	ø (m)
1	1530	0.56
2	380	1.12
3	170	1.67
4	100	2.23
5	60	2.79