



WEVER & DUCRÉ
LIGHTING

MATCH SUSPENDED 5.0

279364W5

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling, Suspended

White Matt

IP20

Interior

Output: 520 lm

LED

3000 K

2 SDCM

OPTICAL

Beam angle 33°

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 9.0 W



Class 2

PHYSICAL

Diameter 26 mm

Height 500 mm

0.36 kg

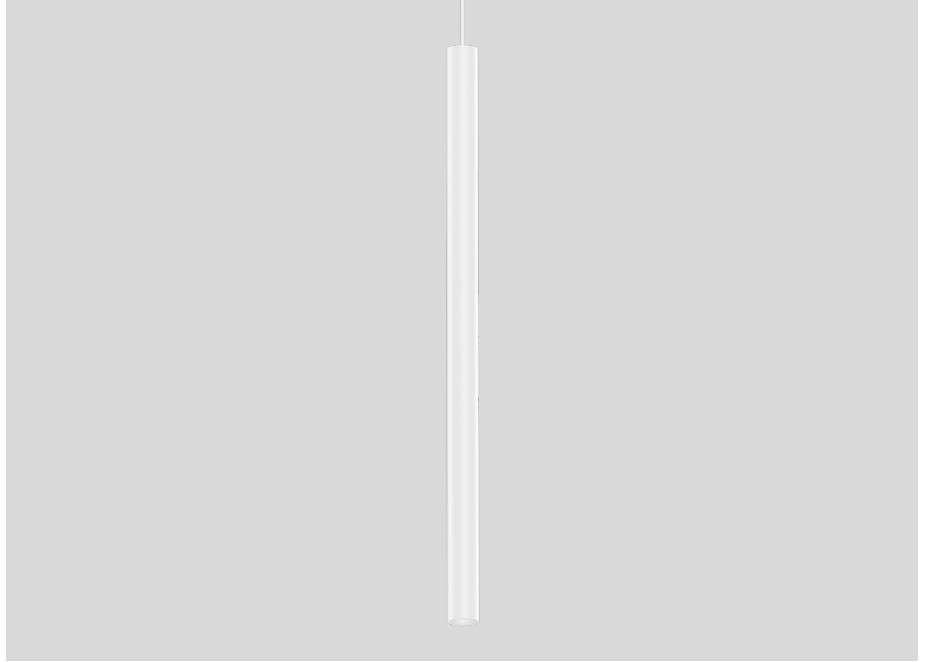

Tubular ceiling suspended luminaire made from die-cast aluminium; surface White Matt; powder coated, matt texture; inclusive adjustable cable suspension max. 2500mm in Pure White; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; 220 - 240 V; beam angle 33°; degree of protection IP20; PC2; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;

