



WEVER & DUCRÉ  
LIGHTING

# PIRRO

## petit SURFACE 6.0

129854WM3

Project
Type
Notes
Quantity
Date

### GENERAL

Ceiling , Surface  
 White Matt + Champagne  
 IP20  
 Interior  
 Output: 960 lm  
 CIE flux code: 98 100 100 100 100

### LED

2700 K  
 CRI  $\geq$  90  
 L80 / 50000h  
 3 SDCM

### OPTICAL


Beam angle 28°

### ELECTRICAL


phase-cut dim  
 220 - 240 V  
 Total connected power 13.4 W  
 Class 1

### PHYSICAL


Length 164 mm  
 Width 31 mm  
 Height 50 mm  
 0.21 kg

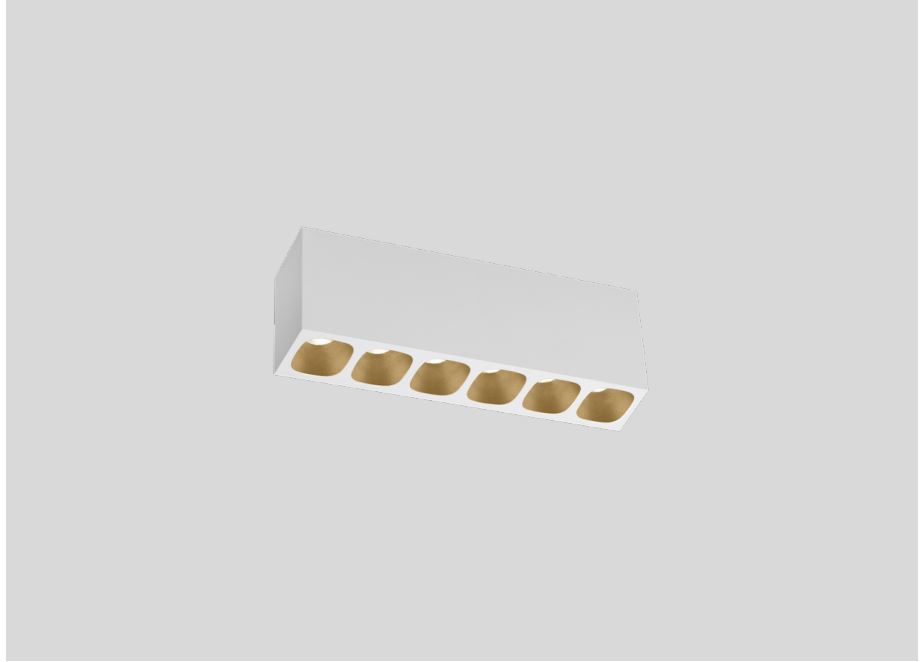

Rectangular ceiling surface mounted downlight made from die-cast aluminium; surface White Matt + Champagne; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  90; beam angle 28°; degree of protection IP20; PCI; UGR  $\leq$  13; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;



### LIGHT DISTRIBUTION



[129854WM3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.  
 © Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ  
LIGHTING

# PIRRO

## petit SURFACE 6.0

129854WM3

### CONE DIAGRAM

25°

h (m)	E0° (lx)	ø (m)
1	3730	0.45
2	930	0.90
3	410	1.35
4	230	1.81
5	150	2.26