



WEVER & DUCRÉ  
LIGHTING

# RONY point 1.0

193161W3

Project

Type

Notes

Quantity

Date

## GENERAL

Ceiling , Recessed

White Matt

RAL 9010<sup>a</sup>

IP20

Interior

Output: 410 lm

## LED

2700 K

2 SDCM

## OPTICAL

Flood , Beam angle 32°

## ELECTRICAL

excl. driver

18 V

LED Inset 5.0 W

Class 3

250 mA

## PHYSICAL

Diameter 56 mm

Height 42 mm

0.05 kg

wire springs

## CUTOUT




Diameter 48-51 mm

Min. ceiling thickness 4 mm

Max. ceiling thickness 25 mm

Recessed depth 60 mm

<sup>a</sup> Color may deviate slightly due to production conditions.

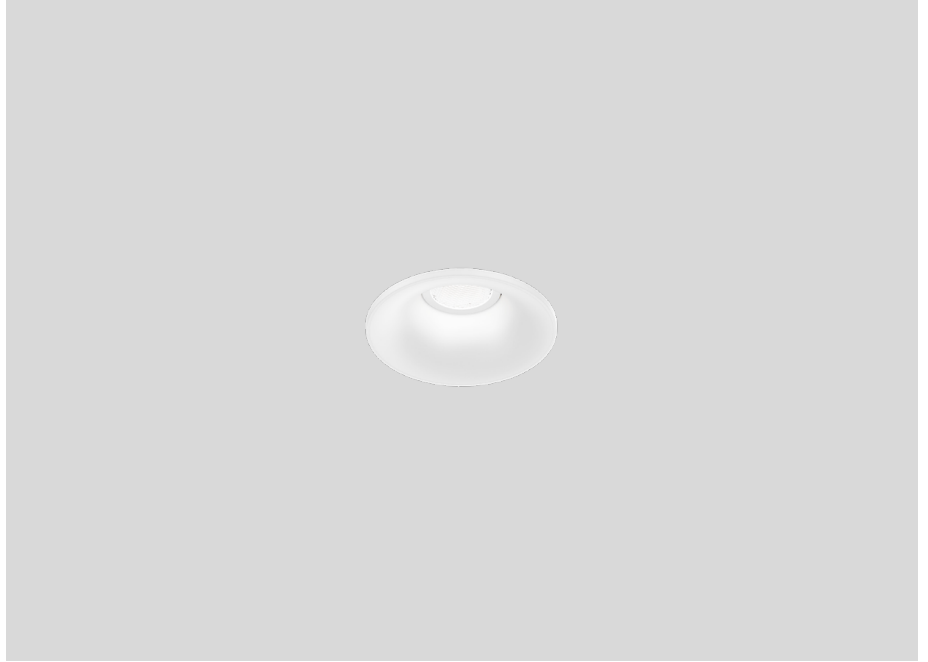



WEVER & DUCRÉ  
LIGHTING

# RONY point 1.0

193161W3

## ELECTRICAL

### Driver

| TYPE                                     | L · W · H (MM) | VOLTAGE | ORDERCODE       |
|--|----------------|---------|-----------------|
| 6W   250mA                               | 115 · 41 · 25  | 13-26V  | 9 0 2 2 6 2 0 1 |
| 7.2W   250mA   16-29V  <br>phase-cut dim | 122 · 41 · 23  | 16-29V  | 9 0 2 2 6 4 0 1 |
| 13W   250mA                              | 144 · 33 · 21  | 2.5-52V | 9 0 2 4 6 5 0 1 |
| 10W   250mA   6-40V   DALI               | 124 · 31 · 21  | 6-40V   | 9 0 2 4 9 4 0 2 |