



WEVER & DUCRÉ  
LIGHTING

# STAKE 1.0

727174A5

Project

Type

Notes

Quantity

Date

## GENERAL

Floor  
Projector  
Anthracite Grey  
IP65  
Exterior  
460 lm

## LED

3000 K  
CRI 90  
L95 / 50000 h  
3-step binning  
MR 0.59  
MDER 0.54

## OPTICAL


Wide Flood

## PHYSICAL

Length 80 mm  
Width 100 mm  
Height 32 mm  
0.55 kg  
Tilt max 90°

## ELECTRICAL


phase-cut dim  
220 - 240 V  
Total connected power 8 W  
PC1  
Safety distance 0.3 m

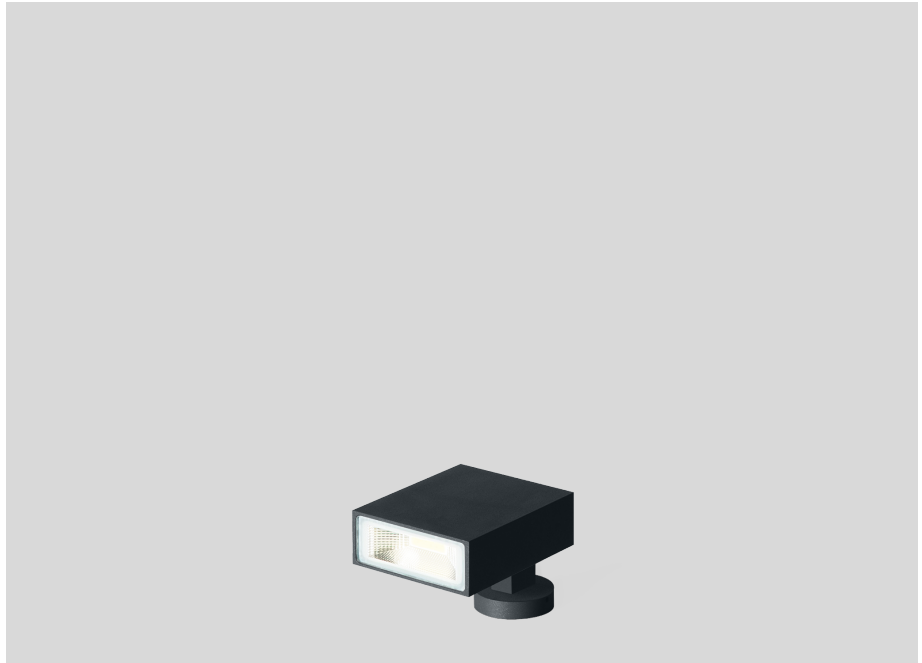

IP65 ±0,3



## LIGHT DISTRIBUTION





**WEVER & DUCRÉ**  
LIGHTING

# STAKE 1.0

727174A5

## Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.98	0.98	0.98	0.97
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF <sup>a</sup>	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF <sup>a</sup>	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

<sup>a</sup> According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

## OPTICAL

### Snoot

TYPE	L · W · H (MM)	ORDERCODE
STAKE   STAKE FOLD	75 · 30 · 39	9 0 0 1 9 0 0 4

## GROUND SPIKE

### Ground Spike

TYPE	Ø · H (MM)	ORDERCODE
STAKE 1.0   STIPO	∅122 · 357	9 0 0 1 3 1 0 6