



WEVER & DUCRÉ
LIGHTING

STATION OUTDOOR 1.0

314774B5

GENERAL

Wall

Surface

Jet Black

IP65

Exterior

520 lm

RAL 9005 ^a

LED

3000 K

CRI 90

L95 / 50000 h

3-step binning

MR 0.59

MDER 0.54

OPTICAL

Wide Flood

PHYSICAL

Length 98 mm

Width 45 mm

Height 98 mm

0.86 kg

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 8 W

PC1

Safety distance 0.3 m

^a RAL Palette colors may deviate slightly due to production conditions.


Project

Type


Notes

Quantity


Date

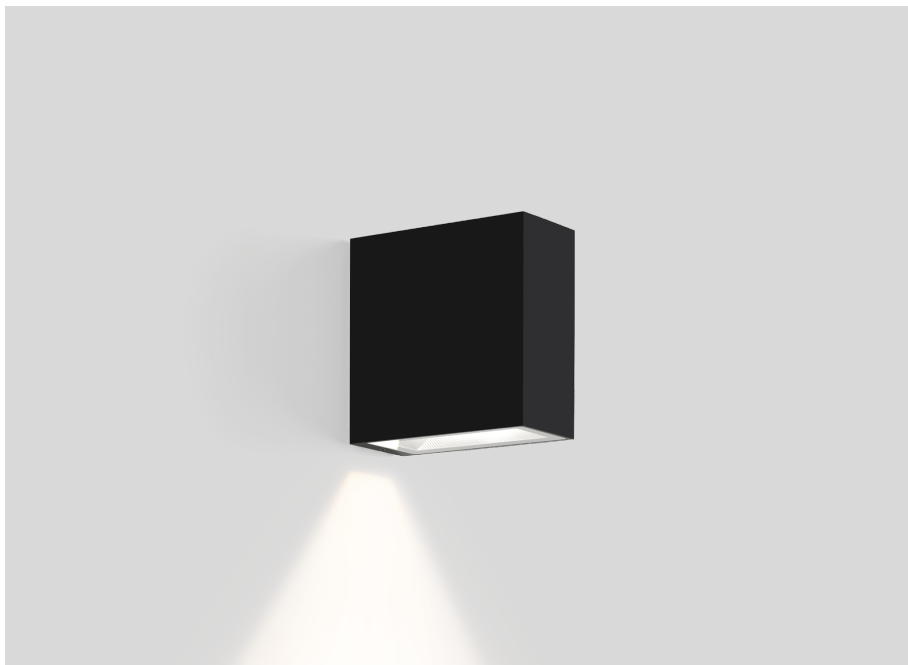

IP65    0,3°



LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

STATION OUTDOOR 1.0

314774B5

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.98	0.98	0.98	0.97
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Faktor

^a According to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.