# 1.0

336174ST3

#### GENERAL

Wall , Surface
Stay Together Plaster
similar to RAL 000 75 00 ª
IP20
Interior
Output: 380 lm

#### LED

2700 K	
$CRI \ge 90$	
3 SDCM	

## ELECTRICAL


phase-cut dim 220 -  $240\,\mathrm{V}$ Total connected power 9.0 W Class 1

## PHYSICAL

Length 300 mm	
Width 120 mm	
1.8 kg	

<sup>a</sup> Color may deviate slightly due to production conditions

Project	
Туре	
Notes	
Quantity	
Date	

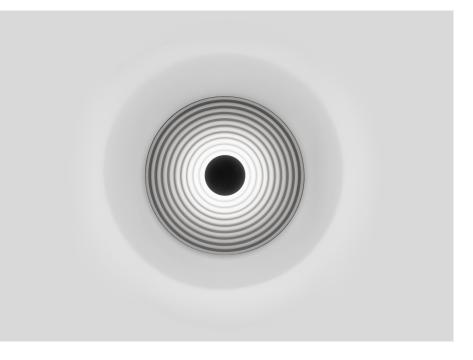



Wall surface luminaire made from composite; indirect light distribution; surface colour "Stay Together Plaster"; similar to RAL 000 75 00; PCB 3-step binning; phase-cut dim; light colour 2700 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  90; 220 - 240 V; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;

