


TAPIS 3.0

336374ST3

Project
Туре
Notes
Quantity
Date


GENERAL Wall, Surface Stay Together Plaster similar to RAL 000 75 00 $^{\rm a}$ IP20 Interior Output: 380 lm **LED** $2700\,\mathrm{K}$ $CRI \geq 90$ $3\,\mathrm{SDCM}$ **ELECTRICAL** phase-cut dim 220 - 240 V Total connected power 9.0 $\rm W$ Class 1 **PHYSICAL** Length 225 mm Width 120 mm Height 450 mm



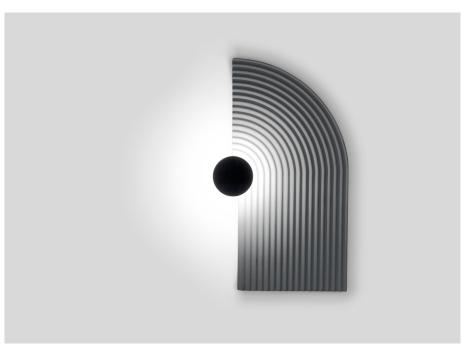



Wall surface luminaire made from composite; indirect light distribution; surface colour "Stay Together $Plaster"; similar\ to\ RAL\ 000\ 75\ 00; PCB\ 3-step\ binning; phase-cut\ dim; light\ colour\ 2700\ K; binning\ initial$ $MacAdam \leq 3 \; SDCM; CRI \geq 90; 220 - 240 \; V; degree \; of \; protection \; IP20; PC1; driver \; included; light source \; protection \; IP20; PC1; driver \; included; light source \; protection \; IP20; PC1; driver \; included; light source \; protection \; IP20; PC1; driver \; included; light source \; protection \; IP20; PC1; driver \; included; light source \; protection \; IP20; PC1; driver \; included; light source \; protection \; IP20; PC1; driver \; included; light source \; protection \; IP20; PC1; driver \; included; light source \; protection \; IP20; PC1; driver \; included; light source \; protection \; PC1; driver \; included; light source \; protection \; PC1; driver \; included; light source \; protection \; PC1; driver \; protection \; protec$ $replaceable\ by\ an\ authorized\ professional;\ control\ gear\ replaceable\ by\ an\ authorized\ professional;$



March 22, 2024