



WEVER & DUCRÉ
LIGHTING

TAPIS SOFT 1.0

336174WF3

Project
Type
Notes
Quantity
Date

GENERAL

Wall , Surface
 Felt White
 IP20
 Interior
 Output: 380 lm

LED


2700 K
 CRI \geq 90
 3 SDCM

ELECTRICAL

phase-cut dim
 220 - 240 V
 Total connected power 9.0 W
 Class 1

PHYSICAL

Length 650 mm
 Width 120 mm
 1.67 kg

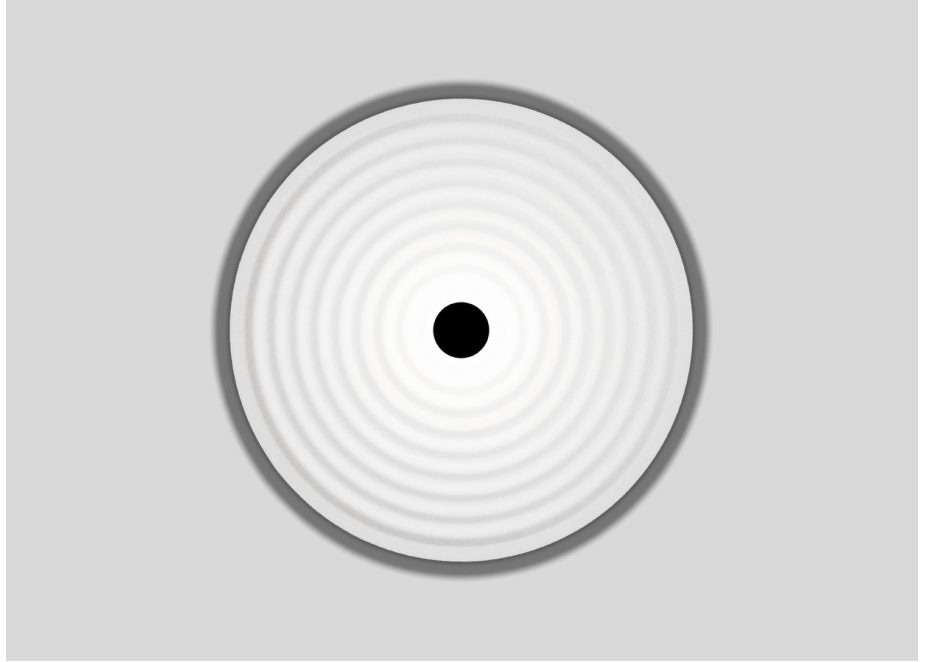

Wall surface luminaire integrated in an acoustic element made of high quality PET felt with sound absorbing properties; 100% recyclable; surface Felt White; PCB 3-step binning; phase-cut dim; light colour 2700 K; binning initial MacAdam \leq 3 SDCM; CRI \geq 90; indirect light distribution; 220 - 240 V; degree of protection IP20; PC1; driver included;

