



WEVER & DUCRÉ  
LIGHTING

# TAPIS SOFT 4.0

336474OF5

Project

Type

Notes

Quantity

Date

## GENERAL

Wall , Surface

Felt Oxide Red

IP20

Interior

Output: 390 lm

## LED

3000 K

CRI  $\geq$  90

3 SDCM

## ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 9.0 W

Class 1


## PHYSICAL

Length 325 mm

Width 120 mm

Height 650 mm

1.14 kg

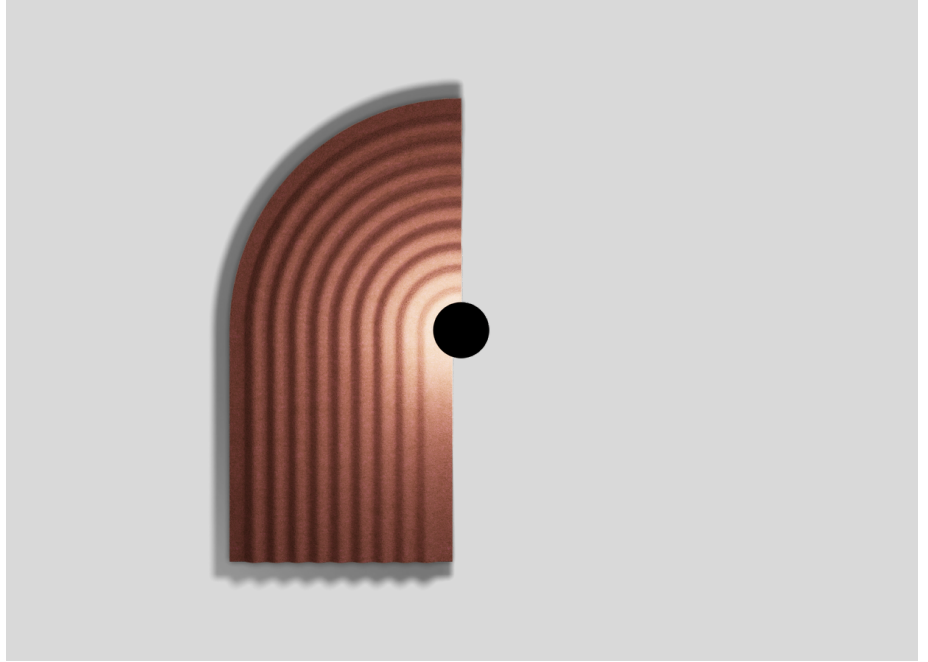

Wall surface luminaire integrated in an acoustic element made of high quality PET felt with sound absorbing properties; 100% recyclable; surface Felt Oxide Red; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam  $\leq$  3 SDCM; CRI  $\geq$  90; indirect light distribution; 220 - 240 V; degree of protection IP20; PCI; driver included;

