



WEVER & DUCRÉ
LIGHTING

TRACE CHANDELIER 1.0

253564B3

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling , Suspended

Black Matt

RAL 9005^a

IP20

Interior

Output: 720 lm

LED

2700 K

2 SDCM

OPTICAL

Flood , Beam angle 34°

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 11.0 W

Class 2

PHYSICAL


Length 1108 mm

Width 28 mm

Height 50 mm

0.64 kg

^a Color may deviate slightly due to production conditions.

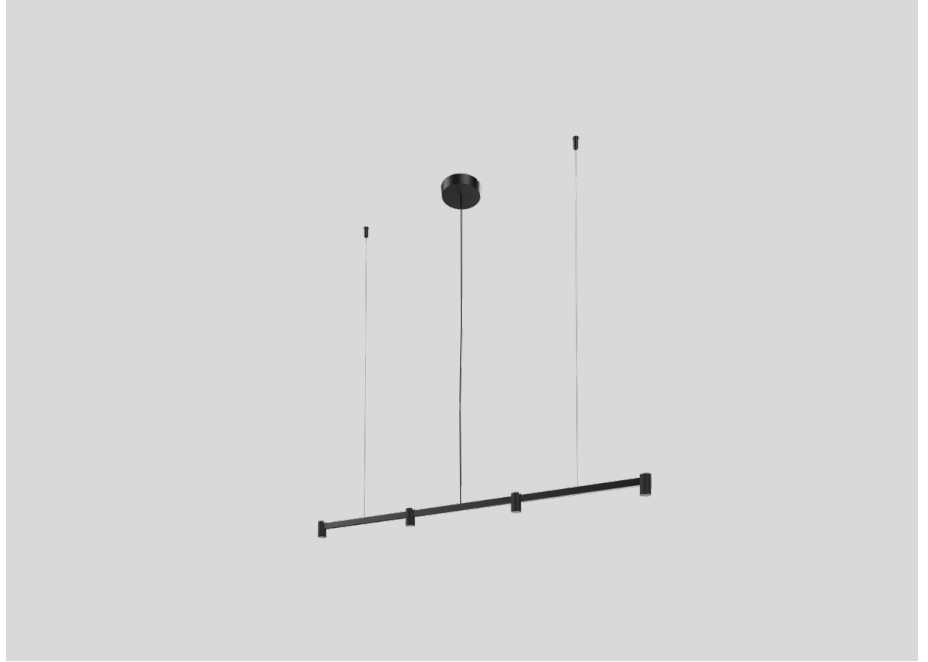

Ceiling suspended luminaire made from aluminium; with 4 spotlights; inclusive adjustable cable suspension max. 2500mm; surface Black Matt; powder coated, matt texture; RAL 9005; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; beam angle 34°; 220 - 240 V; degree of protection IP20; PC2; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;

