



WEVER & DUCRÉ
LIGHTING

TRACE CHANDELIER 2.0

253664B5

Project

Type

Notes

Quantity

Date

GENERAL

Ceiling, Suspended

Black Matt

RAL 9005^a

IP20

Interior

Output: 1200 lm

LED

3000 K

2 SDCM

OPTICAL

Flood, Beam angle 34°

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 15.0 W

Class 2

PHYSICAL


Length 1828 mm

Width 28 mm

Height 50 mm

0.84 kg

^a Color may deviate slightly due to production conditions.

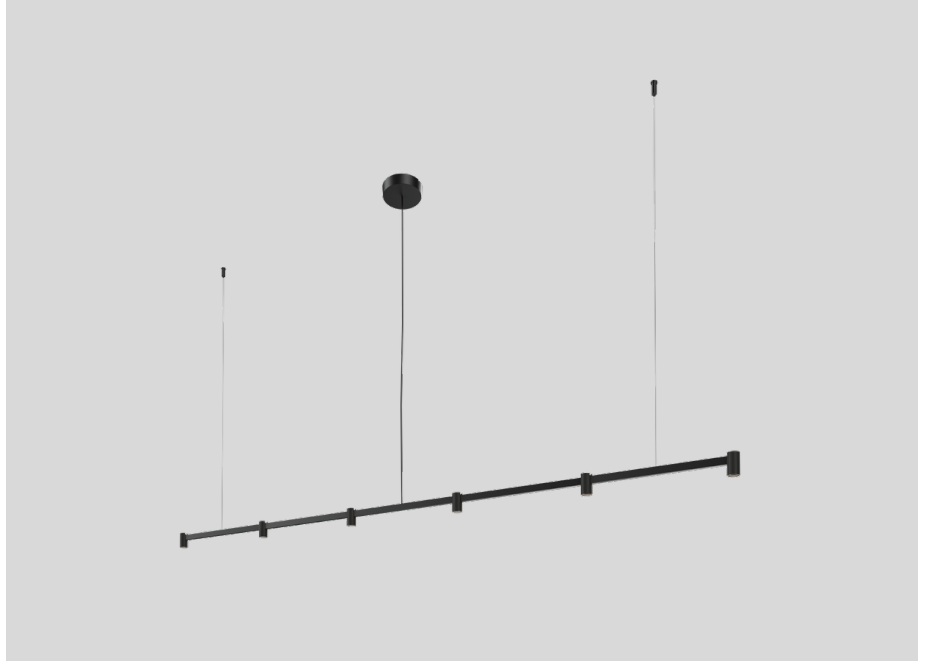

Ceiling suspended luminaire made from aluminium; with 6 spotlights; inclusive adjustable cable suspension max. 2500mm; surface Black Matt; powder coated, matt texture; RAL 9005; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90 ; beam angle 34°; 220 - 240 V; degree of protection IP20; PC2; driver included; light source replaceable by an authorized professional; control gear replaceable by end-user;

