



WEVER & DUCRÉ
LIGHTING

TRACE WALL 1.0

333164W3

Project

Type

Notes

Quantity

Date

GENERAL

Wall , Surface

White Matt

RAL 9010^a

IP20

Interior

Output: 575 lm

CIE flux code: 93 98 100 100 0

LED

2700 K

CRI ≥ 90

L80 / 50000h

2 SDCM

OPTICAL

Medium , Beam angle 22°

ELECTRICAL

phase-cut dim

220 - 240 V

Total connected power 8.1 W

Class 1

PHYSICAL


Length 70 mm

Width 80 mm


Height 100 mm

0.42 kg


^a Color may deviate slightly due to production conditions.

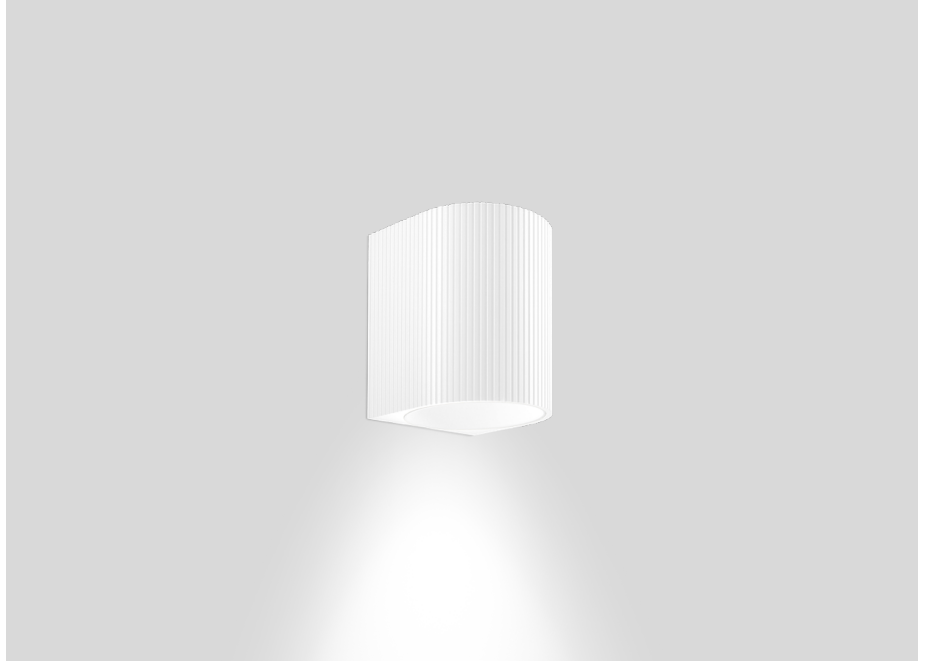

Wall surface luminaire made from aluminium; surface White Matt; powder coated; matt texture; RAL 9010; up or down light emission; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; binning initial MacAdam ≤ 2 SDCM; CRI ≥ 90; 220 - 240 V; degree of protection IP20; PC1; driver included; light source replaceable by an authorized professional; control gear replaceable by an authorized professional;



LIGHT DISTRIBUTION



[333164W3] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré apply.
© Wever & Ducré BV · Spinnerijstraat 99/21 · 8500 Kortrijk · Belgium · www.weverducre.com



WEVER & DUCRÉ
LIGHTING

TRACE WALL 1.0

333164W3