



WEVER & DUCRÉ  
LIGHTING

# TRAIN OUTDOOR 1.0

718668W5

Project
Type
Notes
Quantity
Date

## GENERAL

Ceiling  
 Surface  
 Signal White  
 Below IP65  
 Exterior  
 565 lm

## LED

3000 K  
 CRI  $\geq$  90

## OPTICAL



Beam angle 36°

## ELECTRICAL

phase-cut dim  
 220 - 240 V  
 Total connected power 6 W  
 Class 1  
 Safety distance 0.3 m


## PHYSICAL

Length 52 mm  
 Width 52 mm  
 Height 60 mm  
 0.26 kg

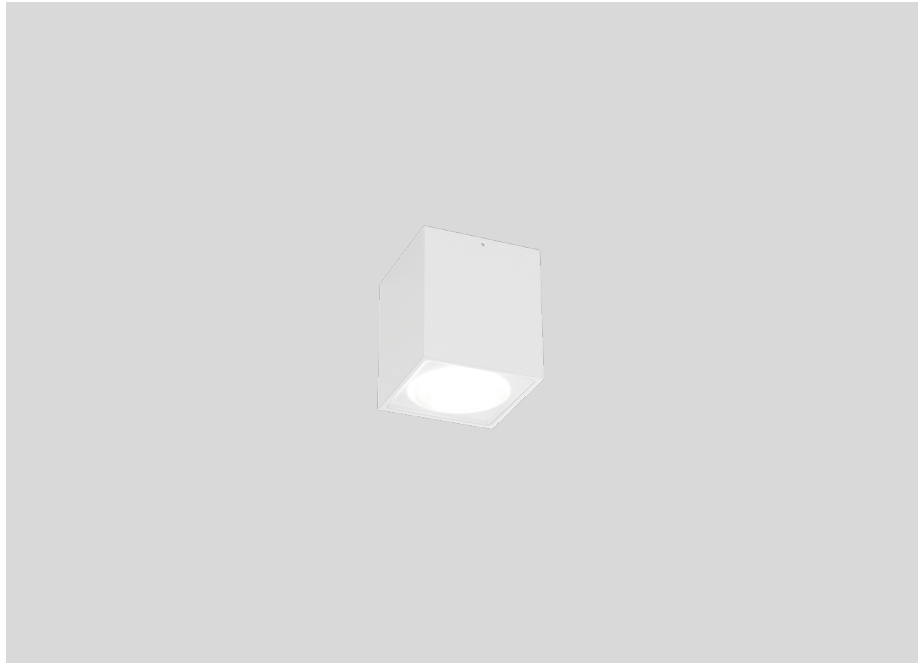

Squared ceiling surface mounted downlight made from die-cast aluminium; surface Signal White; powder coated; matt texture; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; CRI 90; 220 - 240 V; beam angle 36°; degree of protection IP65; PCI; light source not replaceable;

## LIGHT DISTRIBUTION

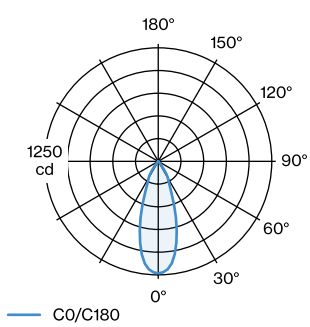



WEVER & DUCRÉ  
LIGHTING

# TRAIN OUTDOOR 1.0

718668W5