



WEVER & DUCRÉ
LIGHTING

TRAIN WALL OUTDOOR 1.0

718868B5

Project
Type
Notes
Quantity
Date

GENERAL

Wall
 Surface
 Jet Black
 RAL 9005^a
 Below IP65
 Exterior
 570 lm

LED

3000 K
 CRI ≥ 90
 L70 B50 / 50000h
 3-step binning

OPTICAL

Beam angle 35°



ELECTRICAL

phase-cut dim
 220 - 240 V
 Total connected power 6 W
 Class 1
 Safety distance 0.3 m


PHYSICAL

Length 50 mm
 Width 50 mm
 Height 85 mm
 0.24 kg


^a Color may deviate slightly due to production conditions.

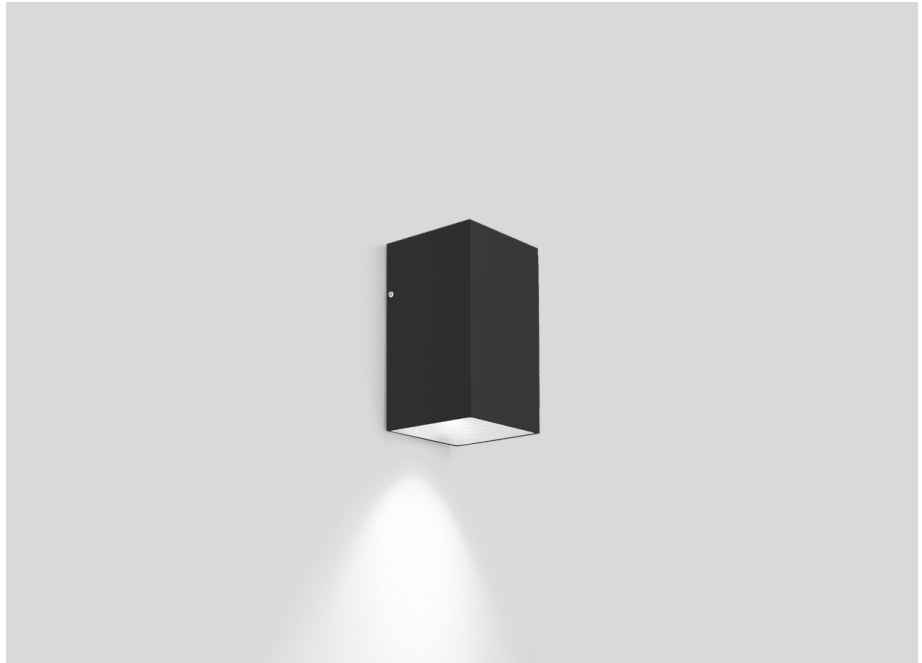

Rectangular wall surface luminaire made from aluminium; surface Jet Black; powder coated; matt texture; RAL 9005; up or down light emission; beam angle 35°; PCB 3-step binning; phase-cut dim; light colour 3000 K; binning initial MacAdam 3 SDCM; CRI 90; 220 - 240 V; degree of protection IP65; PC1; light source not replaceable;



LIGHT DISTRIBUTION





WEVER & DUCRÉ
LIGHTING

TRAIN WALL OUTDOOR 1.0

718868B5

CONE DIAGRAM

35°

h (m)	E0° (lx)	ø (m)
1	1290	0.63
2	320	1.26
3	140	1.89
4	80	2.52
5	50	3.15