

DATASHEET

Type: **IVY SINGLE**
Name: Pendant light
ID: PC1216
Designed by: Lucie Koldová



Download

Description

Nature and its life-giving beauty and strength are the inspiration behind the unique lighting concept called IVY. Just like a growing plant, so too can IVY create a myriad of images. The collection represents an innovative high-tech concept that makes it possible to achieve truly unmatched lighting compositions.

Hung from special coax cables, the lights are easy to install and combine thanks to modular components. Variable and precise in craftsmanship all the way down to the smallest detail, they come in three sizes in either matte light rose, opal, or smoke glass. The distinctive handblown glass elements can be arranged in a seemingly endless variety of compositions and rightly hold their place among artistic, bespoke lighting solutions ideal for public spaces, hotels, offices, and many other projects.



Tech. description


The glass shade with nut is attached to a metal ceiling canopy with LED modul. The fixture is hung on a coaxial cable from the canopy, which is designed for dropped ceilings. The electronics are stowed in the dropped ceiling above the canopy.

Available colour options: <https://mbapi.cz/red/pis/eu/en/pc1216>

CONSTRUCTION SPECIFICATION

Weight: 0.8 kg
Construction material: glass, metal
Cord length [mm]: 2,000 mm
Mounting: Ceiling
Environment: Indoor

DIMENSIONS [mm]



ELECTRICAL SPECIFICATION

Input voltage [V]: 100 - 240 V
Frequency [Hz]: 50-60 Hz
Max. power [W]: 2.5 W LED
Coverage IP: 20
Socket: -
Light source: LED module
Energy class: E

CERTIFICATIONS



BROKIS®

BROKIS S.R.O.
ŠPANIĚLOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ

2024_10
PAGE 1



CM17836 Led modul IVY
SINGLE_D12_2W_2700K_270lm


Type	LED module
Lamp wattage [W]	2,5 W
Input voltage [V]	24 VDC
Energy class	E
Flux [lm]	270 lm +-10%
Light colour [K]	2700 K
CRI	90+
Dimmable	yes






INNER FIXTURE

Dimensions O x w [mm]	80 X 165 mm
Weight [kg]	1 kg
Material	metal

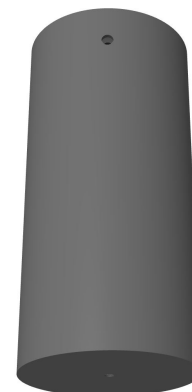

Drawing

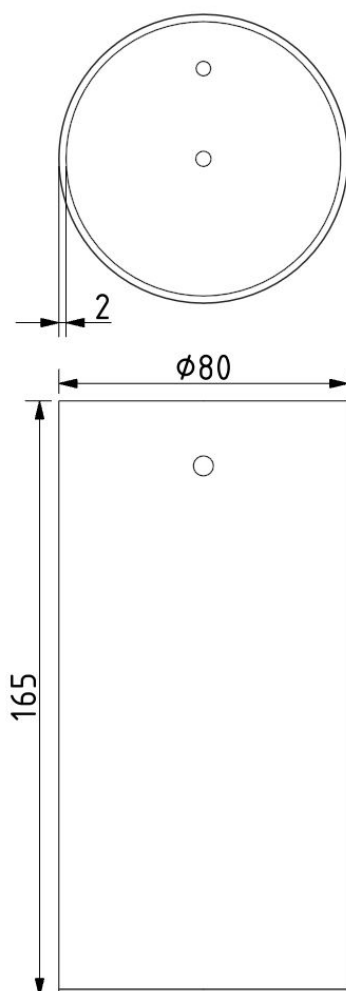

Hole placement

