



## Description

Puro is a boldly minimalistic variation on atmospheric pendant lights. Inspiration for the collection and its name come from the Spanish word for "cigar", which also means "pure" and is a reference to the composition's clean lines. The Puro collection comprises of single vertical or horizontal tube or a single bell light suspended beneath a vertical tube and dual bell lights suspended beneath a horizontal tube. The diffused glow of the tubes combines with that of the bells to elicit a dynamic ambience, while the alternating gloss and matte finishes provide a degree of provocation. When standing alone as single tubes, amazing installations can be created, such as a composition of tubes coupled to a screen dividing space and evoking an intimate atmosphere bordering on scenography. Puro offers atmospheric room lighting as well as lighting for offices, hospitality interiors, boutiques, showrooms and private dining areas.



## Tech. description

Glass tube fitted with throughsockets with connectors on both sides. These sockets are designed for connection between canopy and luminair, and between luminair and bottom part Spotlight (PC1121).

Available colour options: <https://mbapi.cz/red/pis/eu/en/pc1157>

## CONSTRUCTION SPECIFICATION

Hmotnost:	2.8 kg
Použité materiály:	sklo,kov
Délkapřipojovacího vodiče:	2,000 mm
Montáž:	Strop
Prostředí:	vnitřní

## DIMENSIONS [mm]



## ELECTRICAL SPECIFICATION

Jmenovité napětí:	100 - 240 V
Frekvence:	50-60Hz
Max. příkon:	7 W LED
Krytí IP:	20
Patice:	-
Světelný zdroj:	uživatelem nevyměnitelný LED modul
Energetická třída:	E

## CERTIFICATIONS



BROKIS®


BROKIS S.R.O.  
ŠPANIELOVA 1315/25  
163 00 PRAHA 6 - ŘEPY  
CZECH REPUBLIC

ORG ID 64940799  
VAT ID CZ64940799  
C 42174 MĚSTSKÝ SOUD  
V PRAZE

TEL +420 567 211 517  
TECHNICAL@BROKIS.CZ  
INFO@BROKIS.CZ  
WWW.BROKIS.CZ


2024\_02

PAGE 1




CP10214

Type	LED module
Lamp wattage [W]	7 W
Input voltage [V]	24 VDC
Energy class	E
Flux [lm]	595 lm
Light colour [K]	2700 K
CRI	90+
Lifespan [h]	20000h
Dimmable	yes (PWM)



CP10216

Type	LED module
Lamp wattage [W]	7 W
Input voltage [V]	24 VDC
Energy class	E
Flux [lm]	659 lm
Light colour [K]	4000 K
CRI	90+
Lifespan [h]	20000h
Dimmable	yes (PWM)



CP10218

Type	LED module
Lamp wattage [W]	7 W
Input voltage [V]	24 VDC
Energy class	E
Flux [lm]	705 lm
Light colour [K]	5000 K
CRI	90+
Lifespan [h]	20000h
Dimmable	yes (PWM)




### INNER FIXTURE

Dimensions O x w [mm]	110 x 330 mm
Weight [kg]	1.3 kg
Material	glass



### Drawing

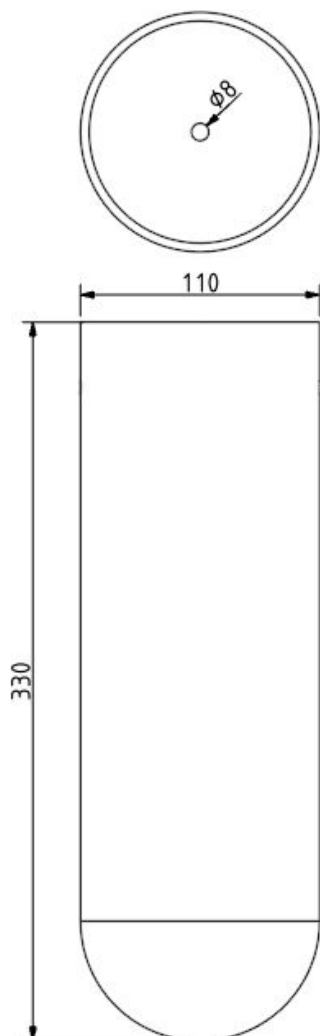

### Hole placement

