




ICE Q WR

56-8015ng2

ICE Q RECESSED WALL LUMINAIRE satined glass satined, max. 500mA, IP40

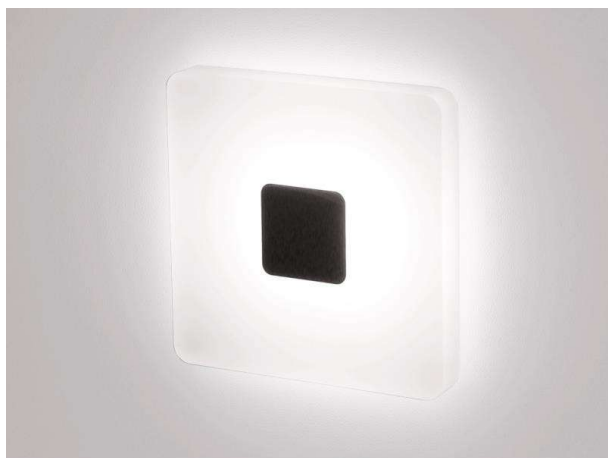

DRAWING

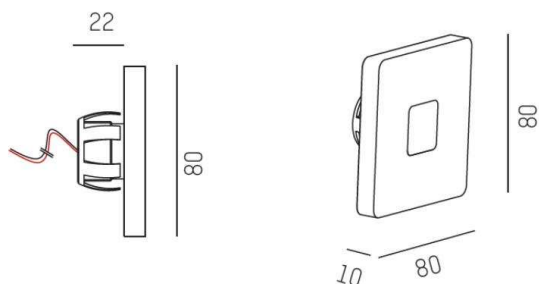

TECHNICAL DETAILS

Bulb type	LED 2W
Luminous flux [lm]	73
Current sec. [mA]	500
Colour temp. [K]	4000K
CRI	>90
Optics	satined glass
Designer	OZ Lighting

Length [mm]	80
Width [mm]	80
Ceiling cutout [mm]	36
Recess depth [mm]	22
IP protection class	IP40
Net weight [kg]	0,118

Glass color	satined
Lifetime [h]	50000
Energy efficiency cl.	A++-A

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.