




CM18016



BROKIS®

CONVEX

APPLIQUE S, M - PC1352, PC1357



Download

COMPONENTS INCLUDED WITH UNIT:

1× light
1× hex key size 2
1× pair cotton gloves
1× installation manual

WARNING:

**Installation must be carried out by
a qualified electrician only.**

**Switch off power at main circuit panel prior to
installation!**

**The manufacturer assumes no liability for
damage occurring during transport or
resulting from incorrect installation.**

Installation time: 30 minutes / 2 persons



BROKIS®

BROKIS S.R.O.
ŠPANELOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG. ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ



CLEANING THE GLASS

BROKIS upholds only the highest possible quality standards. Prior to shipping, the light undergoes several quality controls and stages of cleaning. Because transportation, storage, and the amount of time that passes between packing at our plant and subsequent unpacking by the client can affect the light in different ways, we strongly recommend cleaning it prior to assembly.

The glass must first be rinsed in warm water, and a dish detergent may be used to remove all foreign particles, dust, and grease. Repeat the process if necessary and then dry the glass thoroughly with a paper towel.


Recommendation: Do not use mineral spirits, highly concentrated thinners, or other substances not intended for use on glass surfaces. Do not use any cleaning agents containing silicone, as they may leave a film and attract dust and smudges.

PRIOR TO SHIPPING, THE FUNCTIONALITY OF EACH LIGHT AND ITS COMPONENTS IS THOROUGHLY TESTED. THE MANUFACTURER ASSUMES NO LIABILITY FOR THE MISHANDLING OF PRODUCTS.




1. INSTALLING THE BRACKET 1/2

Using the size 2 hex key, remove the two set screws and separate the bracket from the light.

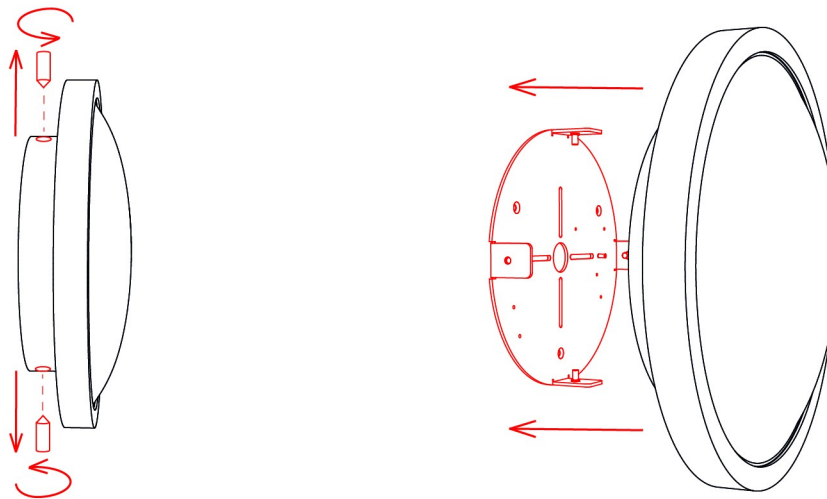


2. INSTALLING THE WALL BRACKET

With regard to various types of walls and materials, we recommend consulting installation with an expert. The manufacturer assumes no liability for incorrect installation or defects in the material to which the bracket is secured. Choose anchors of sufficient strength (not included). Pass the wiring through one of the holes in the bracket and screw the bracket to the wall.

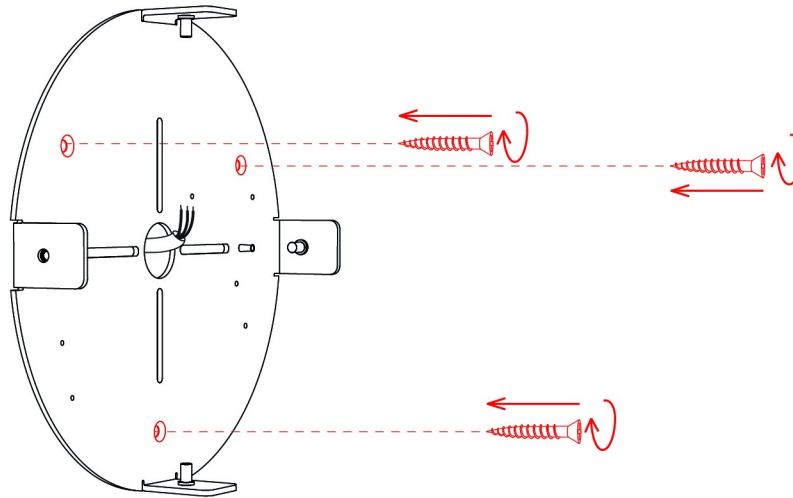



3. CONNECTING THE LIGHT TO THE BUILDING WIRING

Connect the light to the building wiring according to the diagram.

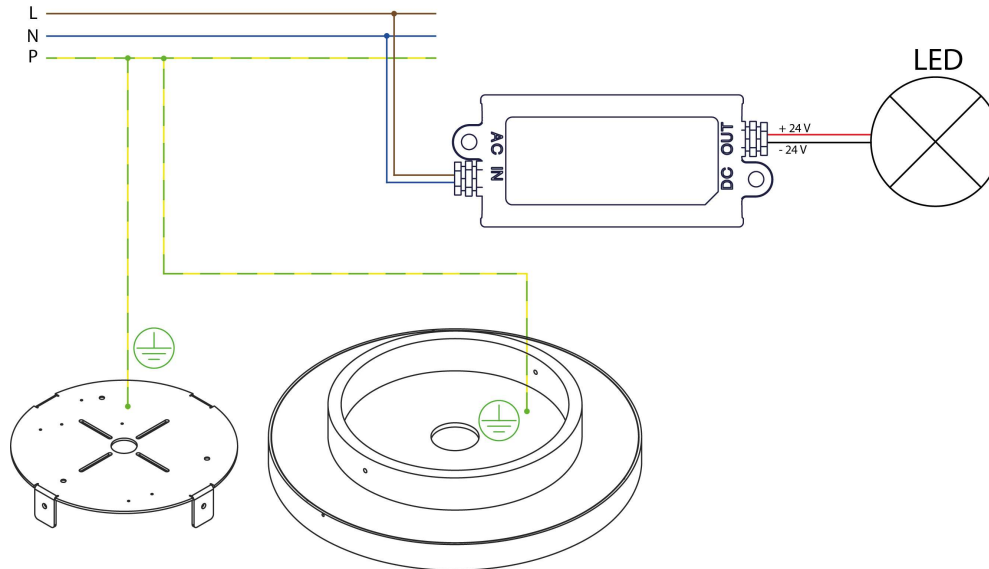

4. INSTALLING THE LIGHT

Position the light on the bracket and secure it in place with the two set screws and the size 2 hex key.

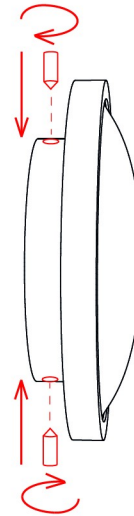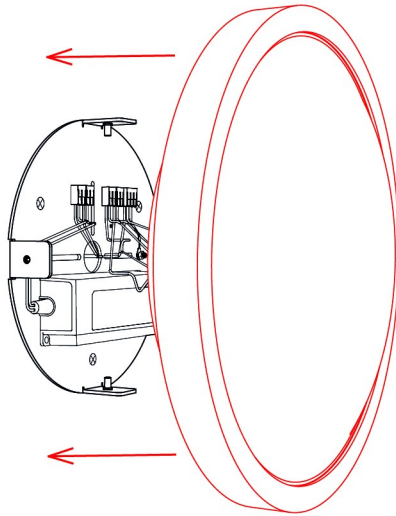

5. SWITCHING ON THE LIGHT

Restore power at the main circuit panel and verify that the light works properly.

