



DOME

CM17999

PENDENT SMALL, MEDIUM, LARGE - PC1346, PC1347, PC1348



COMPONENTS INCLUDED WITH UNIT:

1× light
1× ceiling canopy
2× set screw M5×12
1× hex key size 2.5
1× rubber ring
1× pair cotton gloves
1× installation manual

WARNING:

Installation must be carried out by a qualified electrician only!

Switch off power at main circuit panel prior to installation!

The manufacturer assumes no liability for damage occurring in transport or resulting from incorrect installation.

Installation time: 30 minutes / 2 persons



BROKIS®

BROKIS S.R.O.
ŠPANELOVA 1315/25
163 00 PRAHA 6 - ŘEPY
CZECH REPUBLIC

ORG. ID 64940799
VAT ID CZ64940799
C 42174 MĚSTSKÝ SOUD
V PRAZE

TEL +420 567 211 517
TECHNICAL@BROKIS.CZ
INFO@BROKIS.CZ
WWW.BROKIS.CZ



CLEANING THE GLASS

BROKIS upholds only the highest possible quality standards. Prior to shipping, the light undergoes several quality controls and stages of cleaning. Because transportation, storage, and the amount of time that passes between packing at our plant and subsequent unpacking by the client can affect the light in different ways, we strongly recommend cleaning it prior to assembly.

The glass must first be rinsed in warm water, and a dish detergent may be used to remove all foreign particles, dust, and grease. Repeat the process if necessary and then dry the glass thoroughly with a paper towel.


Recommendation: Do not use mineral spirits, highly concentrated thinners, or other substances not intended for use on glass surfaces. Do not use any cleaning agents containing silicone, as they may leave a film and attract dust and smudges.

PRIOR TO SHIPPING, THE FUNCTIONALITY OF EACH LIGHT AND ITS COMPONENTS IS CHECKED THOROUGHLY. THE MANUFACTURER ASSUMES NO LIABILITY FOR THE MISHANDLING OF PRODUCTS.



1. INSTALLING THE CEILING CANOPY BRACKET


Using anchors of sufficient strength (not included), attach the bracket to the ceiling. With regard to various types of ceilings, we recommend consulting installation with an expert. The manufacturer assumes no liability for incorrect installation, the use of improper anchors, or defects in the material to which this load-bearing component is secured.

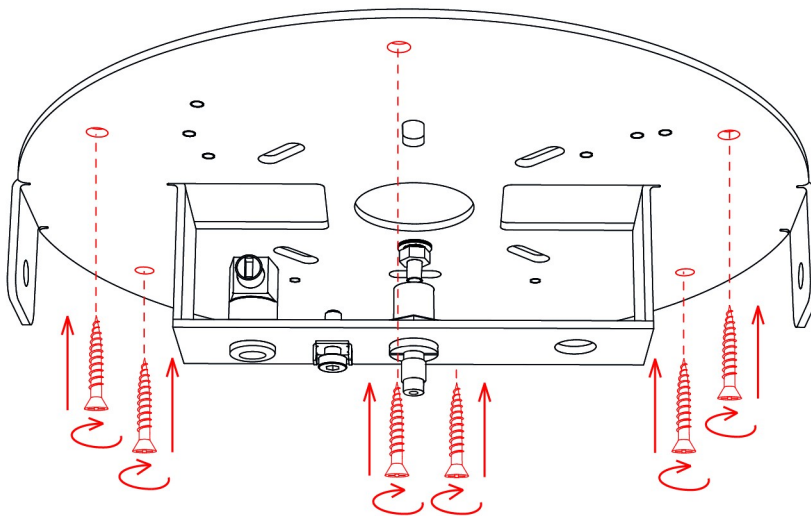

2. INSTALLING THE LIGHT


Pass the wire rope and power cable through the rubber O-ring.

Next, pass the wire rope through hole A in the ceiling canopy and the power cable through hole B.

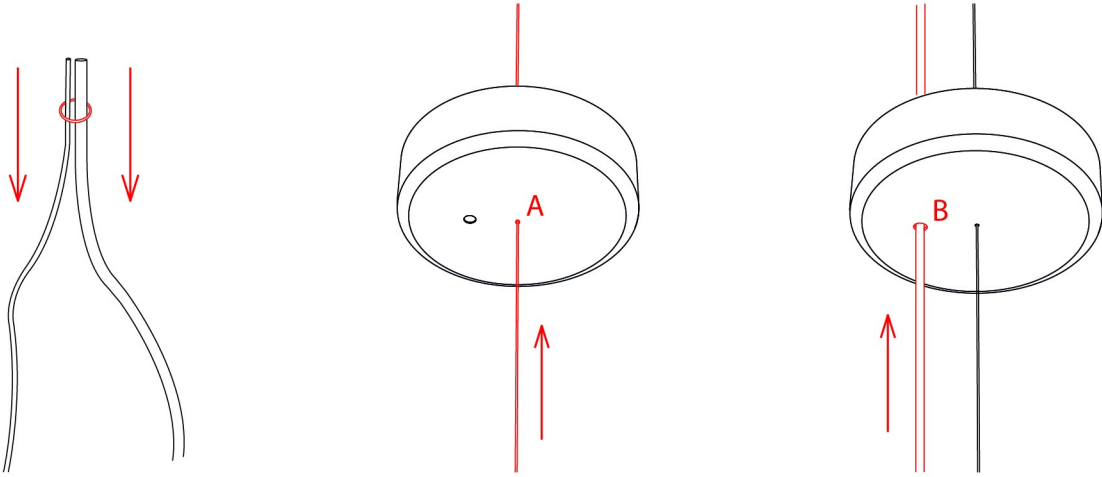


3. INSTALLING THE LIGHT - WIRE ROPE

With an assistant holding the light, install the wire rope in the first part of the wire rope gripper by loosening the cylinder and passing the unfayed wire rope through it to a sufficient length. Then pass the wire rope through the second part of the gripper attached to the ceiling bracket and retighten the cylinder. Trim the wire rope to a length of at least 70 mm and secure it under the locking screw. These steps will ensure that the wire rope, which bears the entire weight of the light, is securely anchored.

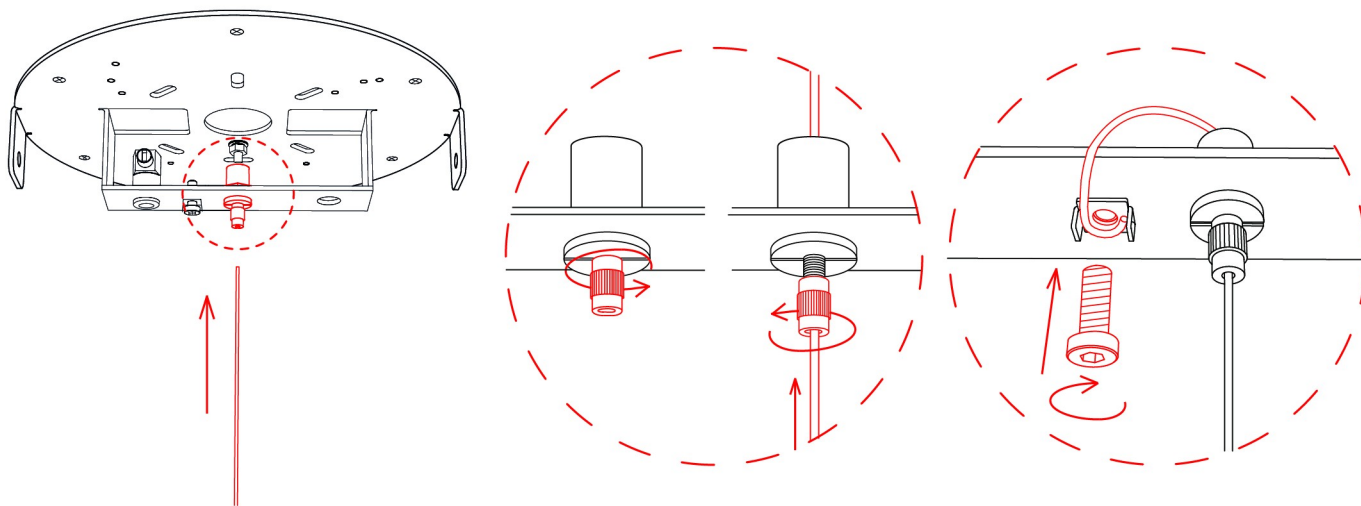


4. INSTALLING THE POWER CABLE

Pass the power cable through the plastic stop in the ceiling canopy, adjust the length as needed, and then secure it by tightening the screw in the plastic stop.

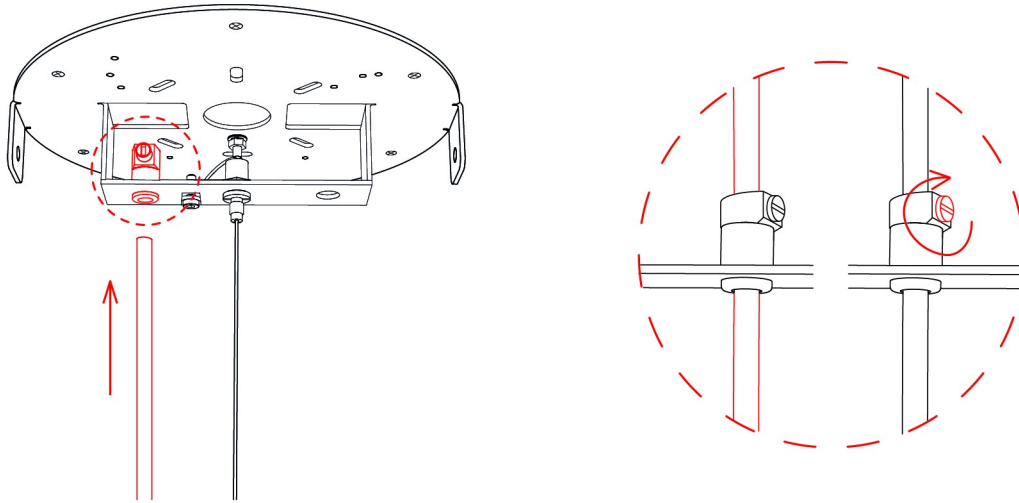


5. CONNECTING THE LIGHT TO THE BUILDING WIRING

Connect the light to the building wiring according to the connection diagram.

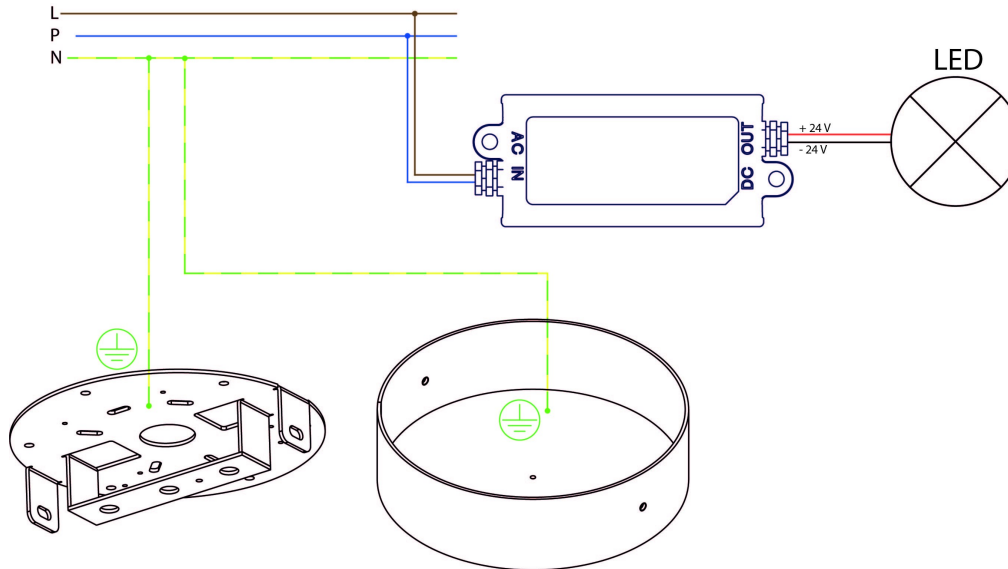

6. INSTALLING THE CEILING CANOPY

Using the two M5×12 set screws and size 2.5 hex key, attach the ceiling canopy to the bracket.

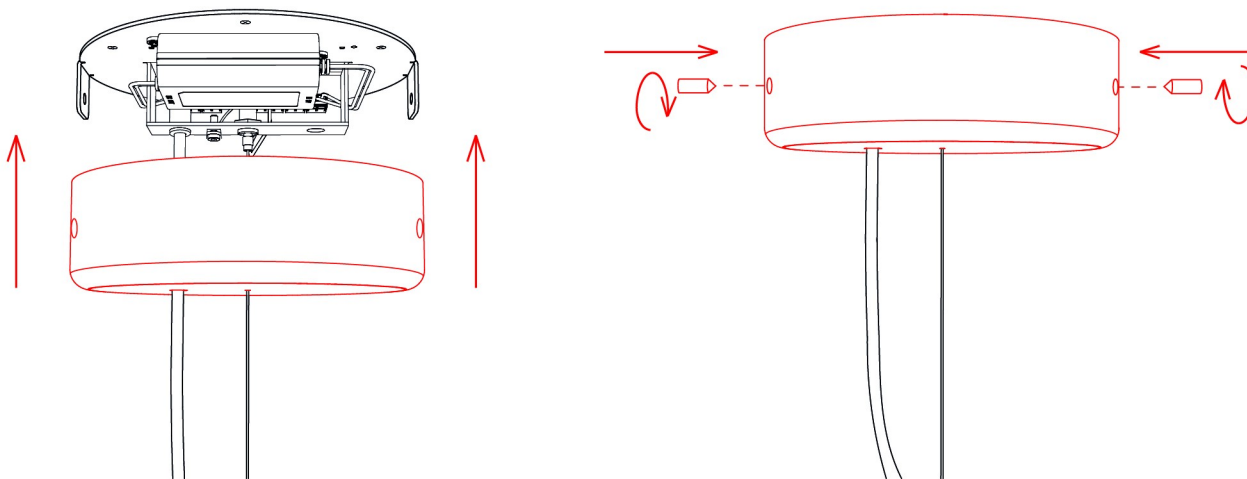

7. SWITCHING ON THE LIGHT

Restore power at the main circuit panel and verify that the light works properly.

